


DETAIL OF FALSE CEILING PLAN IN C.R. (SEE NOTE 8)



1. ALL DIMENSIONS ARE EXPRESSED IN MILLIMETERS
2. THE ELEVATION 100.000 CORRESPONDS TO (HIGH POINT OF PAVING) AND IS EQUIVALENT +5.20m NAP
3. THE ROOF, THE WALLS AND ELEVATED FLOOR OF THE BUILDING SHALL PROVIDE TWO HOURS FIRE RESISTANCE
4. THE STAIRWELLS SHALL BE PROVIDED OF EMERGENCY LIGHTING.
5. CABLES CHANNEL LAYOUT IS INDICATIVE
6. THE COMPLETE SYSTEM INSULATION TO BE 160mm THICK
7. THE U-VALUE (MEASURE OF THE RATE OF HEAT LOSS THROUGH A MATERIAL) ARE:
FLOORS: 0.27 W/m²/K
ROOFING: 0.24 W/m²/K
EXTERNAL PAVING/GROUND: PAVING: 0.24 W/m²/K WINDOWS: 1.1 W/m²/K, WITH MAX 4 SOLAR SHADING FACTOR
8. FOR FALSE CEILING PRODUCT DETAIL, SEE METSO DRAWINGS PROVIDED BY TECHNIP.

LEGEND

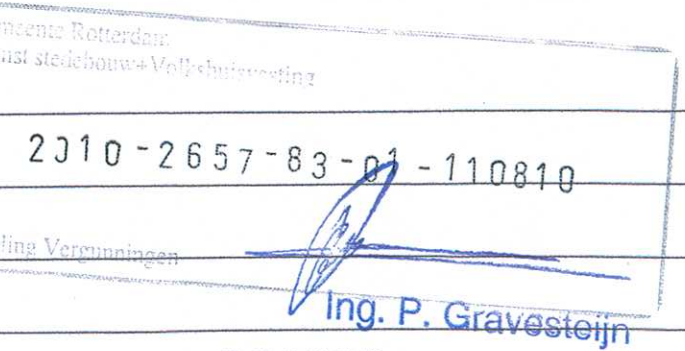

TECHNIP ITALY S.p.A. - 00148 ROMA - Viale Castello della Magliana, 68