




Features

Productgroup	CubiQ Wall Mount
Power supply	Integrated
Input voltage	100 - 305 Vac 142 - 431 Vdc
Frequency	47 - 63 Hz
Input Power (max.)	50 Watt
Lumen output (up to)	5409 lm
Colour temperature (CCT)	3000 4000 5700 K
Colour rendering index (CRI)	83+ 73+
Colour consistency	5 Macadam Ellipses
Upward light ratio (ULR)	< 1%
LED-count	13 25
Optic	PMMA
Beam optics	A-Symmetrical
Housing	Painted Aluminium (Dark Grey)
Mounting	Vertical flat surface
Dimensions	320 x 163 x 215 mm
EOS wireless technology	Yes
Motion sensor (PIR)	Available
Ingress protection	IP67
Mechanical impact resistance	IK08
IEC safety class	I
Power factor	0.95
AC harmonics	Less than 10% THD compliant to EN55015
Inrush current	50 A 350 µs
B-16A fuse	5 pcs
C-16A fuse	8 pcs
Operating temperature	-30 °C to +60 °C**
Rated life (L80B10)	100,000+ hours

Dimensions

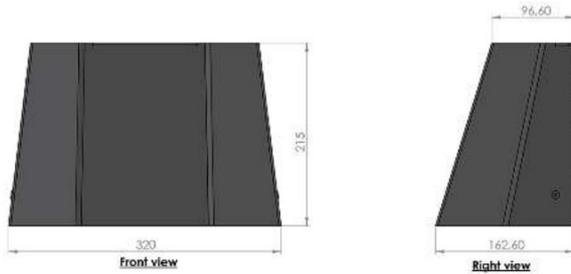

Ordering information

Name	SKU	Optic	Power	Lumen	Efficacy	CCT	CRI	Weight
CubiQ Wall Mount 13 LED								
Wall Mount. 20W default. 4000K. Dark Grey	19330	A-Symm.	20 W	2898 lm	119 lm/W	4000 K	83+	2.62 kg
Wall Mount. 20W default. 4000K. PIR. Dark Grey	19445	A-Symm.	20 W	2898 lm	119 lm/W	4000 K	83+	2.62 kg
Wall Mount. 20W default. 5700K. Dark Grey	19369	A-Symm.	20 W	2890 lm	118 lm/W	5700 K	73+	2.25 kg
Wall Mount. 20W default. 5700K. PIR. Dark Grey	19446	A-Symm.	20 W	2890 lm	119 lm/W	5700 K	73+	2.62 kg
CubiQ Wall Mount 25 LED								
Wall Mount. 40W default. 4000K. Dark Grey	19332	A-Symm.	40 W	5534 lm	115 lm/W	4000 K	83+	2.25 kg
Wall Mount. 40W default. 4000K. PIR. Dark Grey	19334	A-Symm.	40 W	5534 lm	115 lm/W	4000 K	83+	2.62 kg
Wall Mount. 40W default. 5700K. Dark Grey	19331	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.25 kg
Wall Mount. 40W default. 5700K. PIR. Dark Grey	19333	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.62 kg
Wall Mount. 40W default. 5700K. PIR. ████████	19953	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.62 kg
Wall Mount. 40W default. 5700K. ████████	20140	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.62 kg