



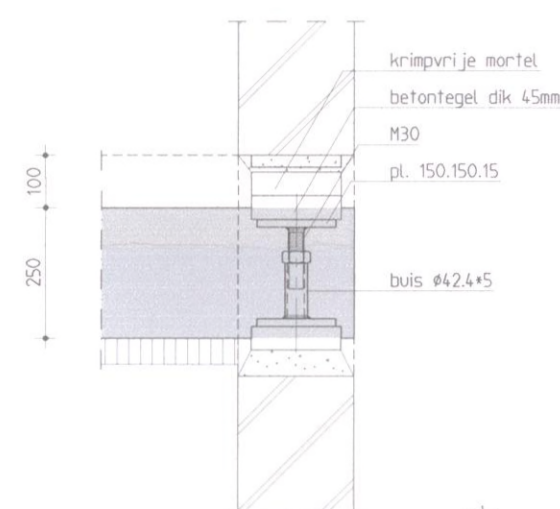


Let op: de hoogtemaat tussen betontegels moet groter zijn dan de korfhoogte!

Wij adviseren voor de heilwerkzaamheid de staat van de bestaande fundering te onderzoeken.

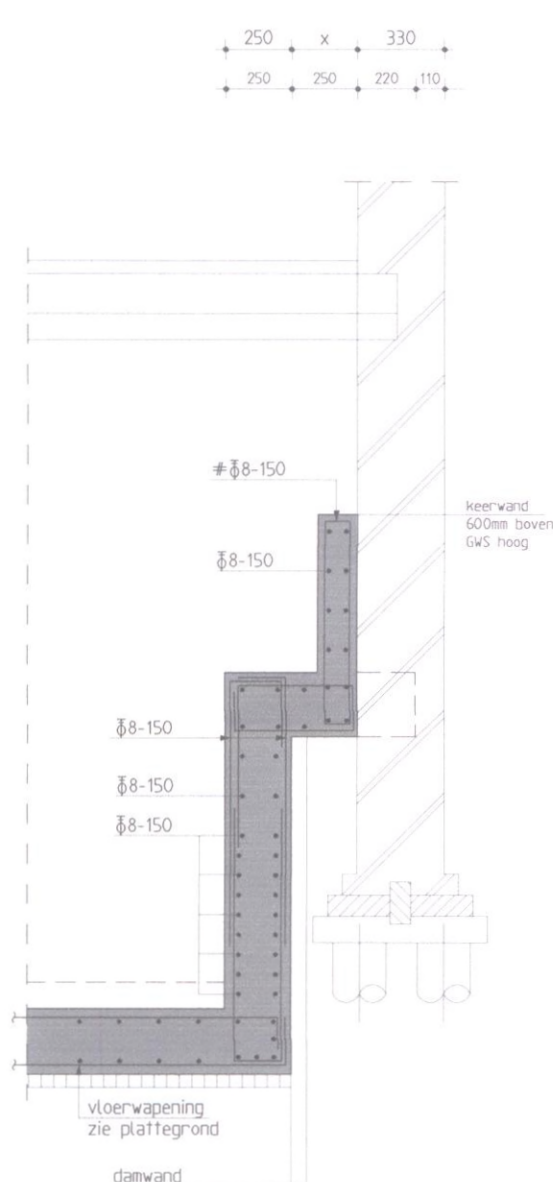



drsn. C

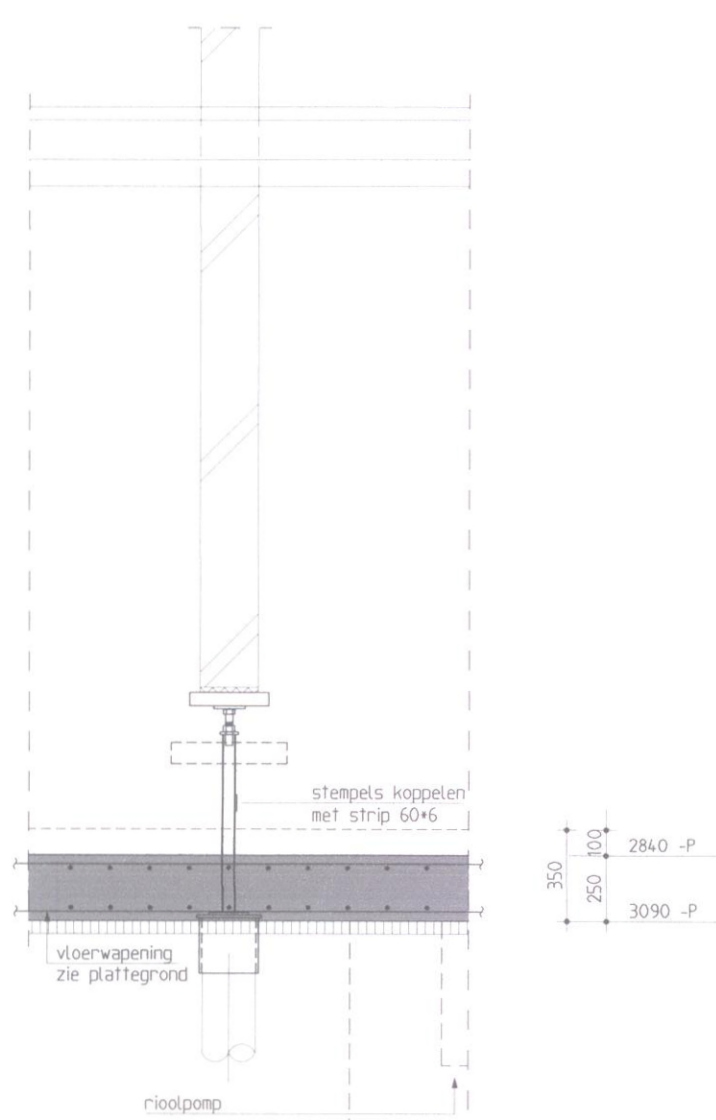

alle palen i.h.w. opzoeken
en vizels plaatsen

alle paken i.h.w. opzoeken
en vizels plaatsen

alle palen i.h.w. opzoeken
en vijzels plaatsen

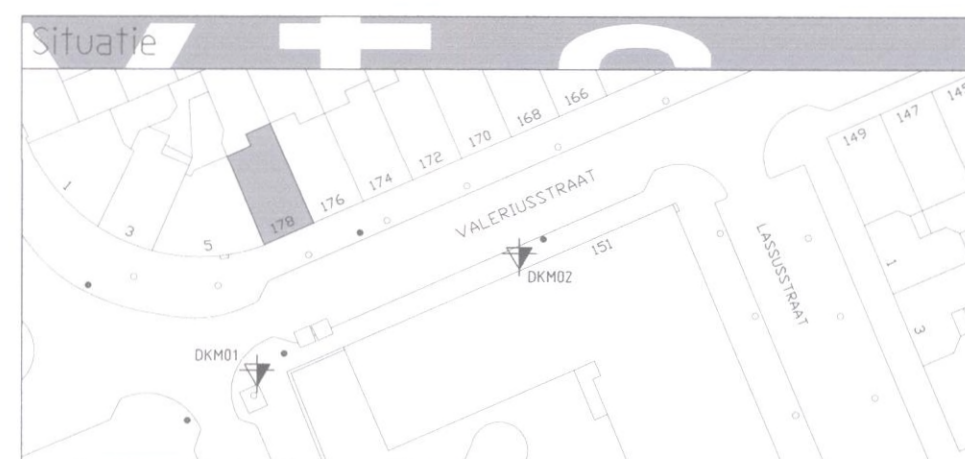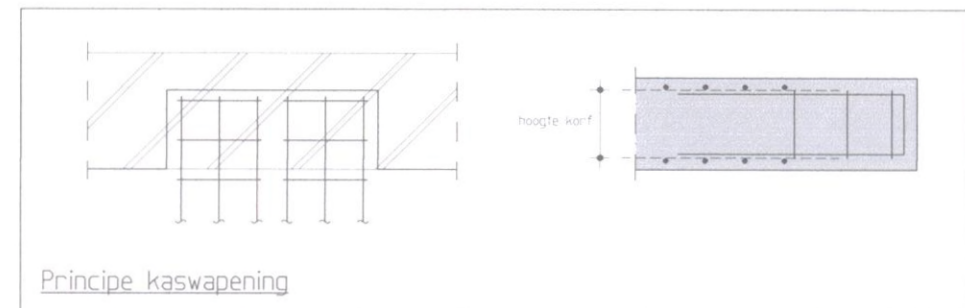[illegible]

The image contains three technical drawings of a corner joint (hoekverbinding) in a wall, showing different construction details and dimensions.

- Lastenle (Load-bearing):** A cross-section of an L-shaped wall corner. The vertical part has a height of 300 cm and a width of 20 cm. The horizontal part has a width of 20 cm. The corner is reinforced with a mesh (geel) and horizontal reinforcement (waarping).
- Principle hoekverbinding:** A cross-section of an L-shaped wall corner. The vertical part has a height of 300 cm and a width of 20 cm. The horizontal part has a width of 20 cm. The corner is reinforced with a mesh (geel) and horizontal reinforcement (waarping). The drawings show the reinforcement details, including the mesh (geel) and horizontal reinforcement (waarping).
- Dekking (Covering):** A cross-section of an L-shaped wall corner. The vertical part has a height of 300 cm and a width of 20 cm. The horizontal part has a width of 20 cm. The corner is reinforced with a mesh (geel) and horizontal reinforcement (waarping). The drawings show the reinforcement details, including the mesh (geel) and horizontal reinforcement (waarping).

Betonconstructie		
betonkwaliteit :	C30/37	uitvoering volgens : NEN-1992-1-1
ceementsoort :	CEM III/B42,5 LH HS	NEN-206-1 en NEN 8005
betonstaalkwaliteit :	B500B	NEN-13670
milieuklasse :	XC4	
nominaal korrel :	315 mm	
consistentiegebied :	2/3	

aanduiding wapening

Maten in het werk controleren !!

Woning	Datum	Omschrijving	Totaalprijs
Kopie van: Dhr. M. Voskuilen Architect Sense Architectuur en Design vries- vaalvriesstraat 178 Amsterdam Onderdeel: Zelfdragende kelderbak + wapening			 Duyts bouw Oudekerkplein 8, V. Postcode 1017 CA Amsterdam Telefoon: 020 633 5033 Mail: info@duytsb.nl Telefoon: 020 666 76 75 Fax: 020 666 76 35 E-mail: info@duytsb.nl www.duytsb.nl