

Datasheet ValkPitched - Clamp for tiled roofs

Technical specifications

- Standard hooks for portrait, and twist hooks for landscape panel mounting.
- Thanks to height adjustability in de roof hook, profiles can be mounted in a straight line.
- All roof hooks are made of stainless steel.
- Pre-mounted with hamerhead bolt and surration nut.
- Side mounting for easy and fast installation.
- Special screws with special tip for strong fixation.

Article overview

Behoort bij beschikking van
Burgemeester en Wethouders
van Leiden

Wabo Z/22/3382094



Standard roof	
USP	High flexibility thanks to three-way adjustability of the hook
Article number	747844
Description	Stainless steel roof hook - adjustable side
Strength	855 N
Adjustability top	27 mm
Adjustability bottom	13 mm
Adjustability width	50 mm
Min. batten distance	65 mm
Article number	747845
Description	Stainless steel roof hook - adjustable side twist
Strength	855 N
Adjustability top	27 mm
Adjustability bottom	13 mm
Adjustability width	50 mm
Min. batten distance	65 mm




Fixation material

Torx-screw	
USP	Special tip and thread for easy and strong fixation
Article number	773360
Description	Stainless steel torx-screw T30
Measurements	5,5 x 58 (thread: 36 mm)




Measurements

Art. nr. 747844

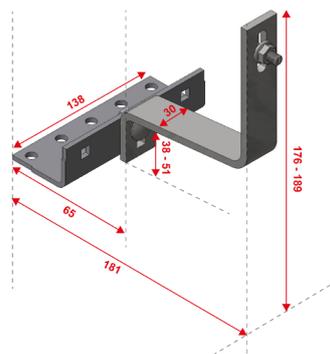

Art. nr. 747845

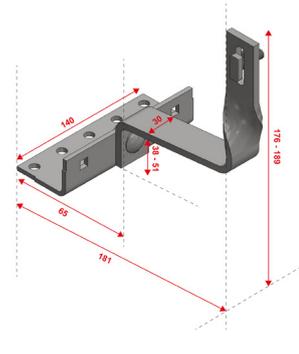

CONTACT DETAILS | DEVELOPER AND PRODUCER OF SOLAR MOUNTING SYSTEMS

Van der Valk Solar Systems + International

Westernesse 18 - 2635 BG Den Hoorn, The Netherlands
 +31 174 25 49 99
 sales@valksolarsystems.com

Valk Solar Systems UK + IE

+44 1304 89 76 58
 sales@valksolarsystems.co.uk

Valk Solar Systems Ibérica

+34 699 326 544
 ventas@valksolarsystems.es

Valk Solar Systems Nordics

+46 7 24 41 60 82
 sales@valksolarsystems.se