



Indien belasting niet is
aangegeven dan kan men
uitgaan van 20 kN/m2


Bruin is bestaand

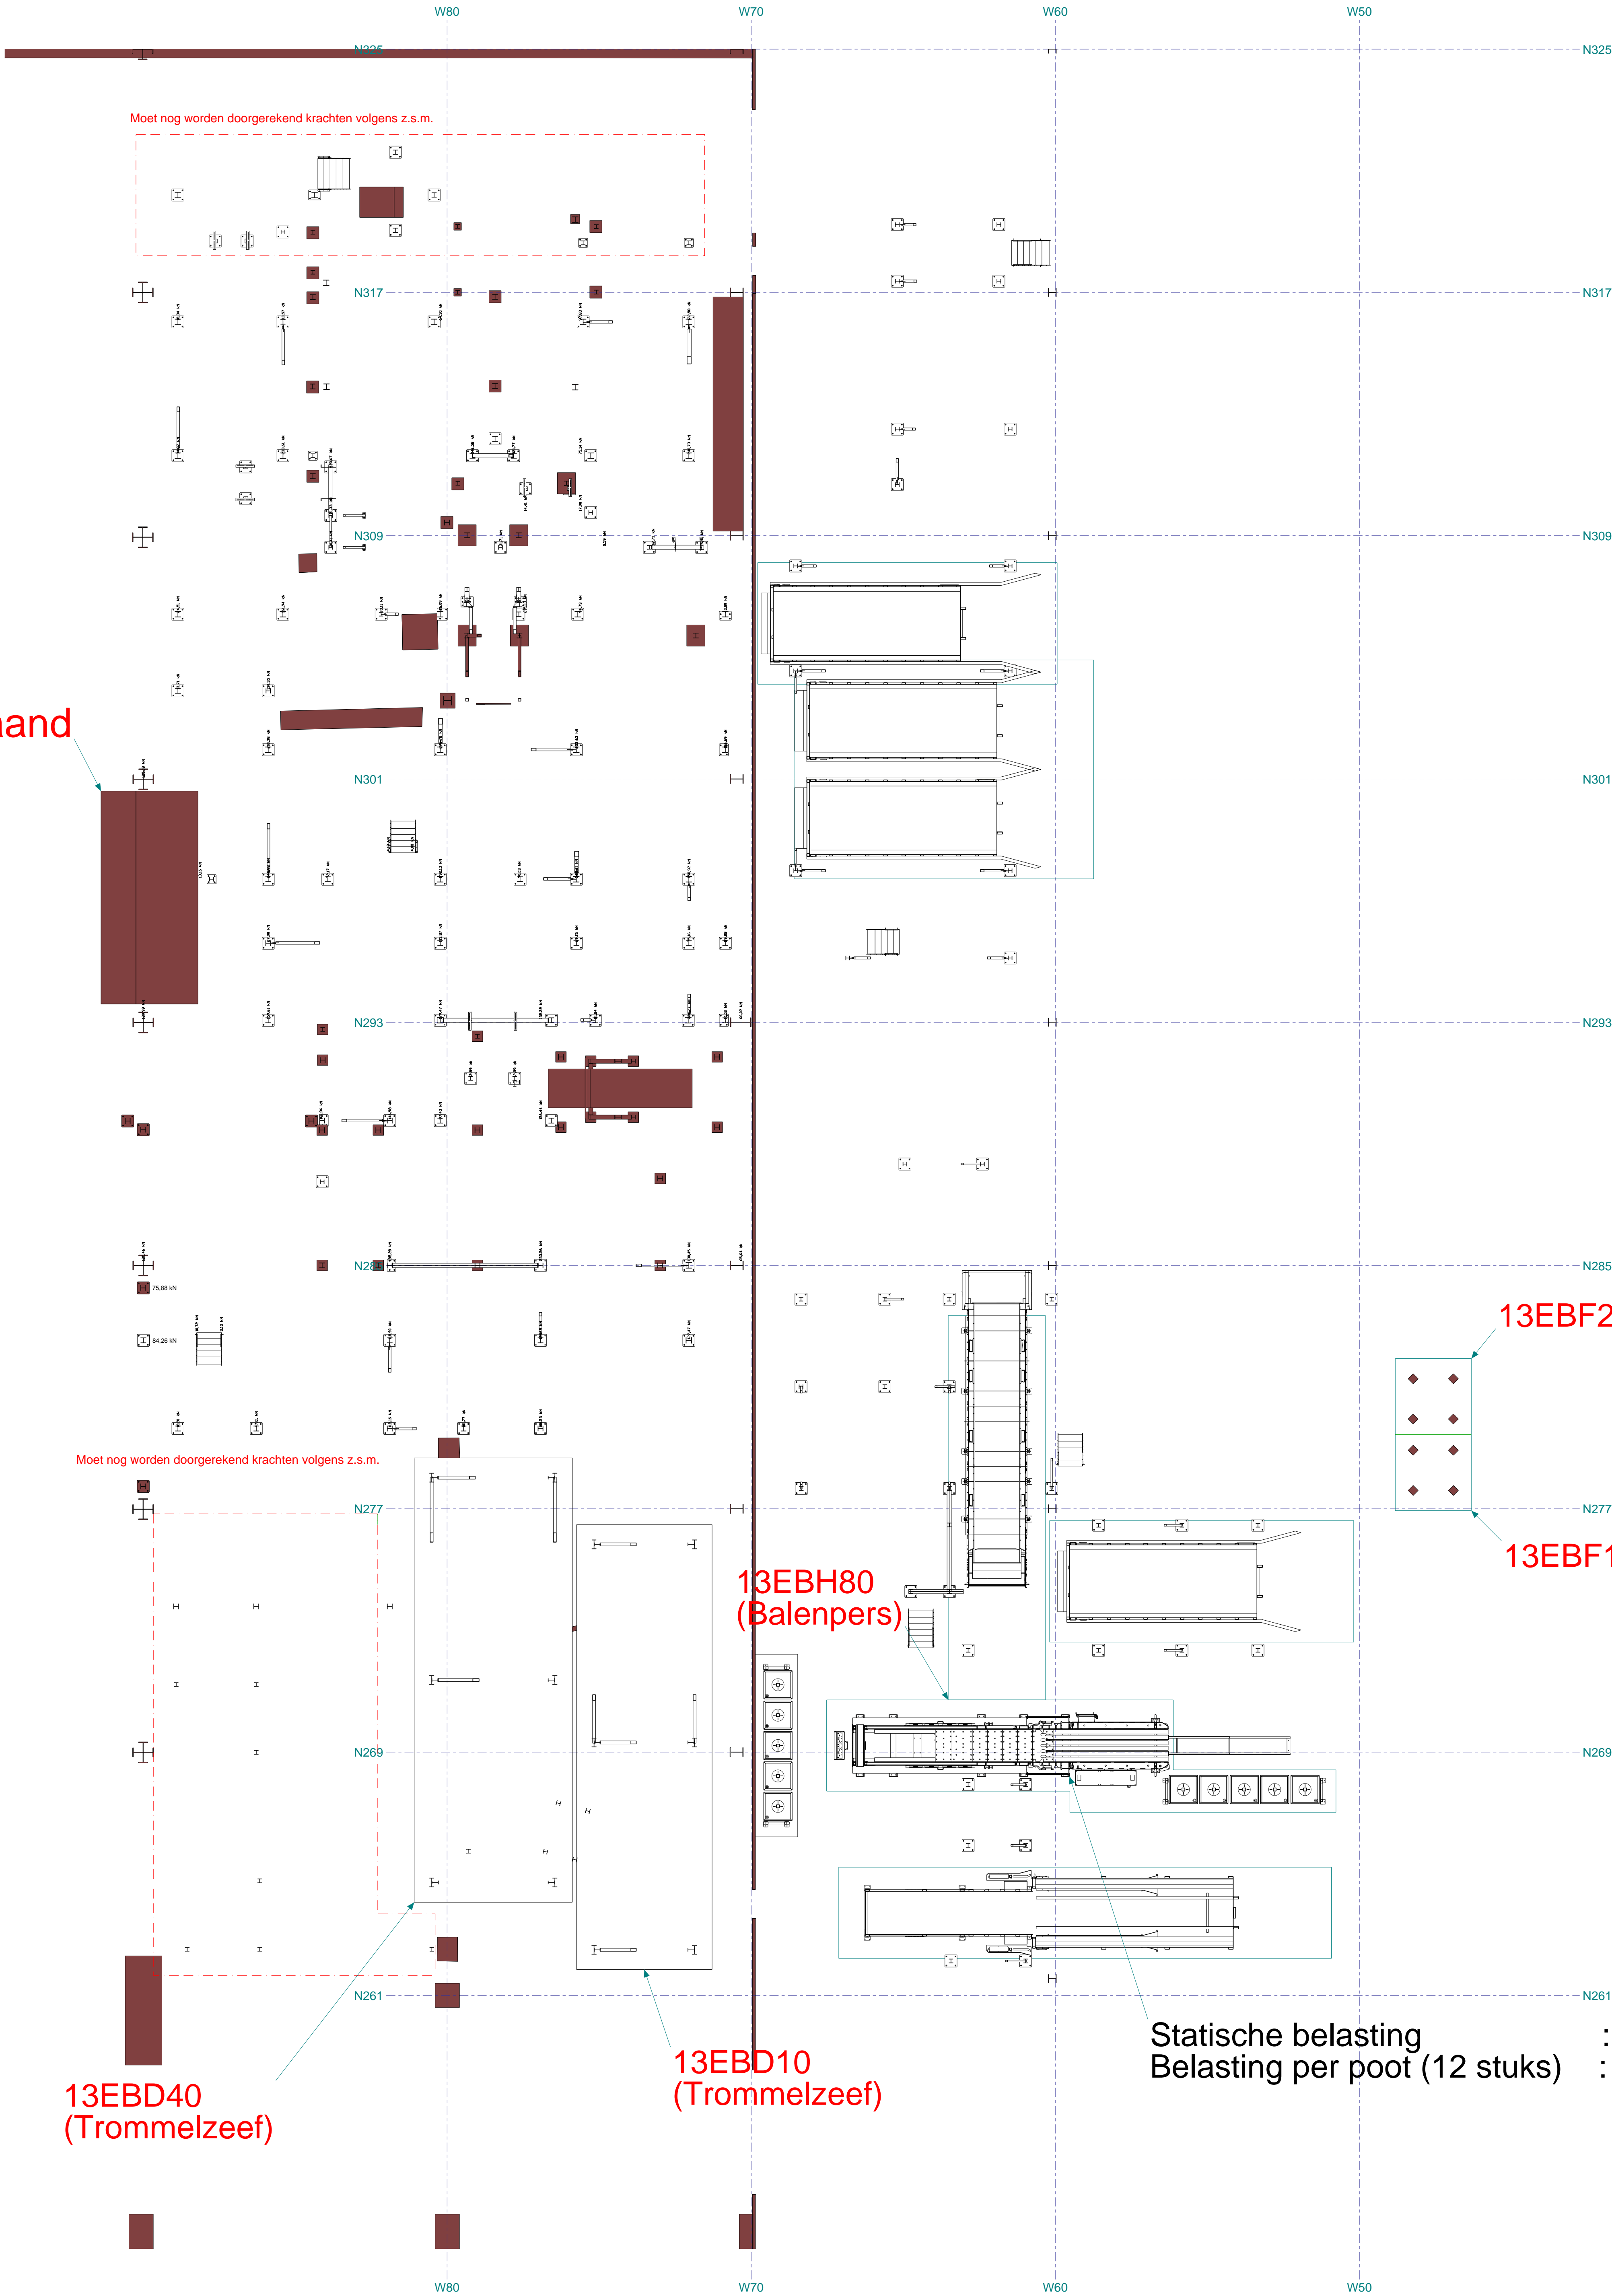

Belasting: 13EBD10 (Trommelzeef)

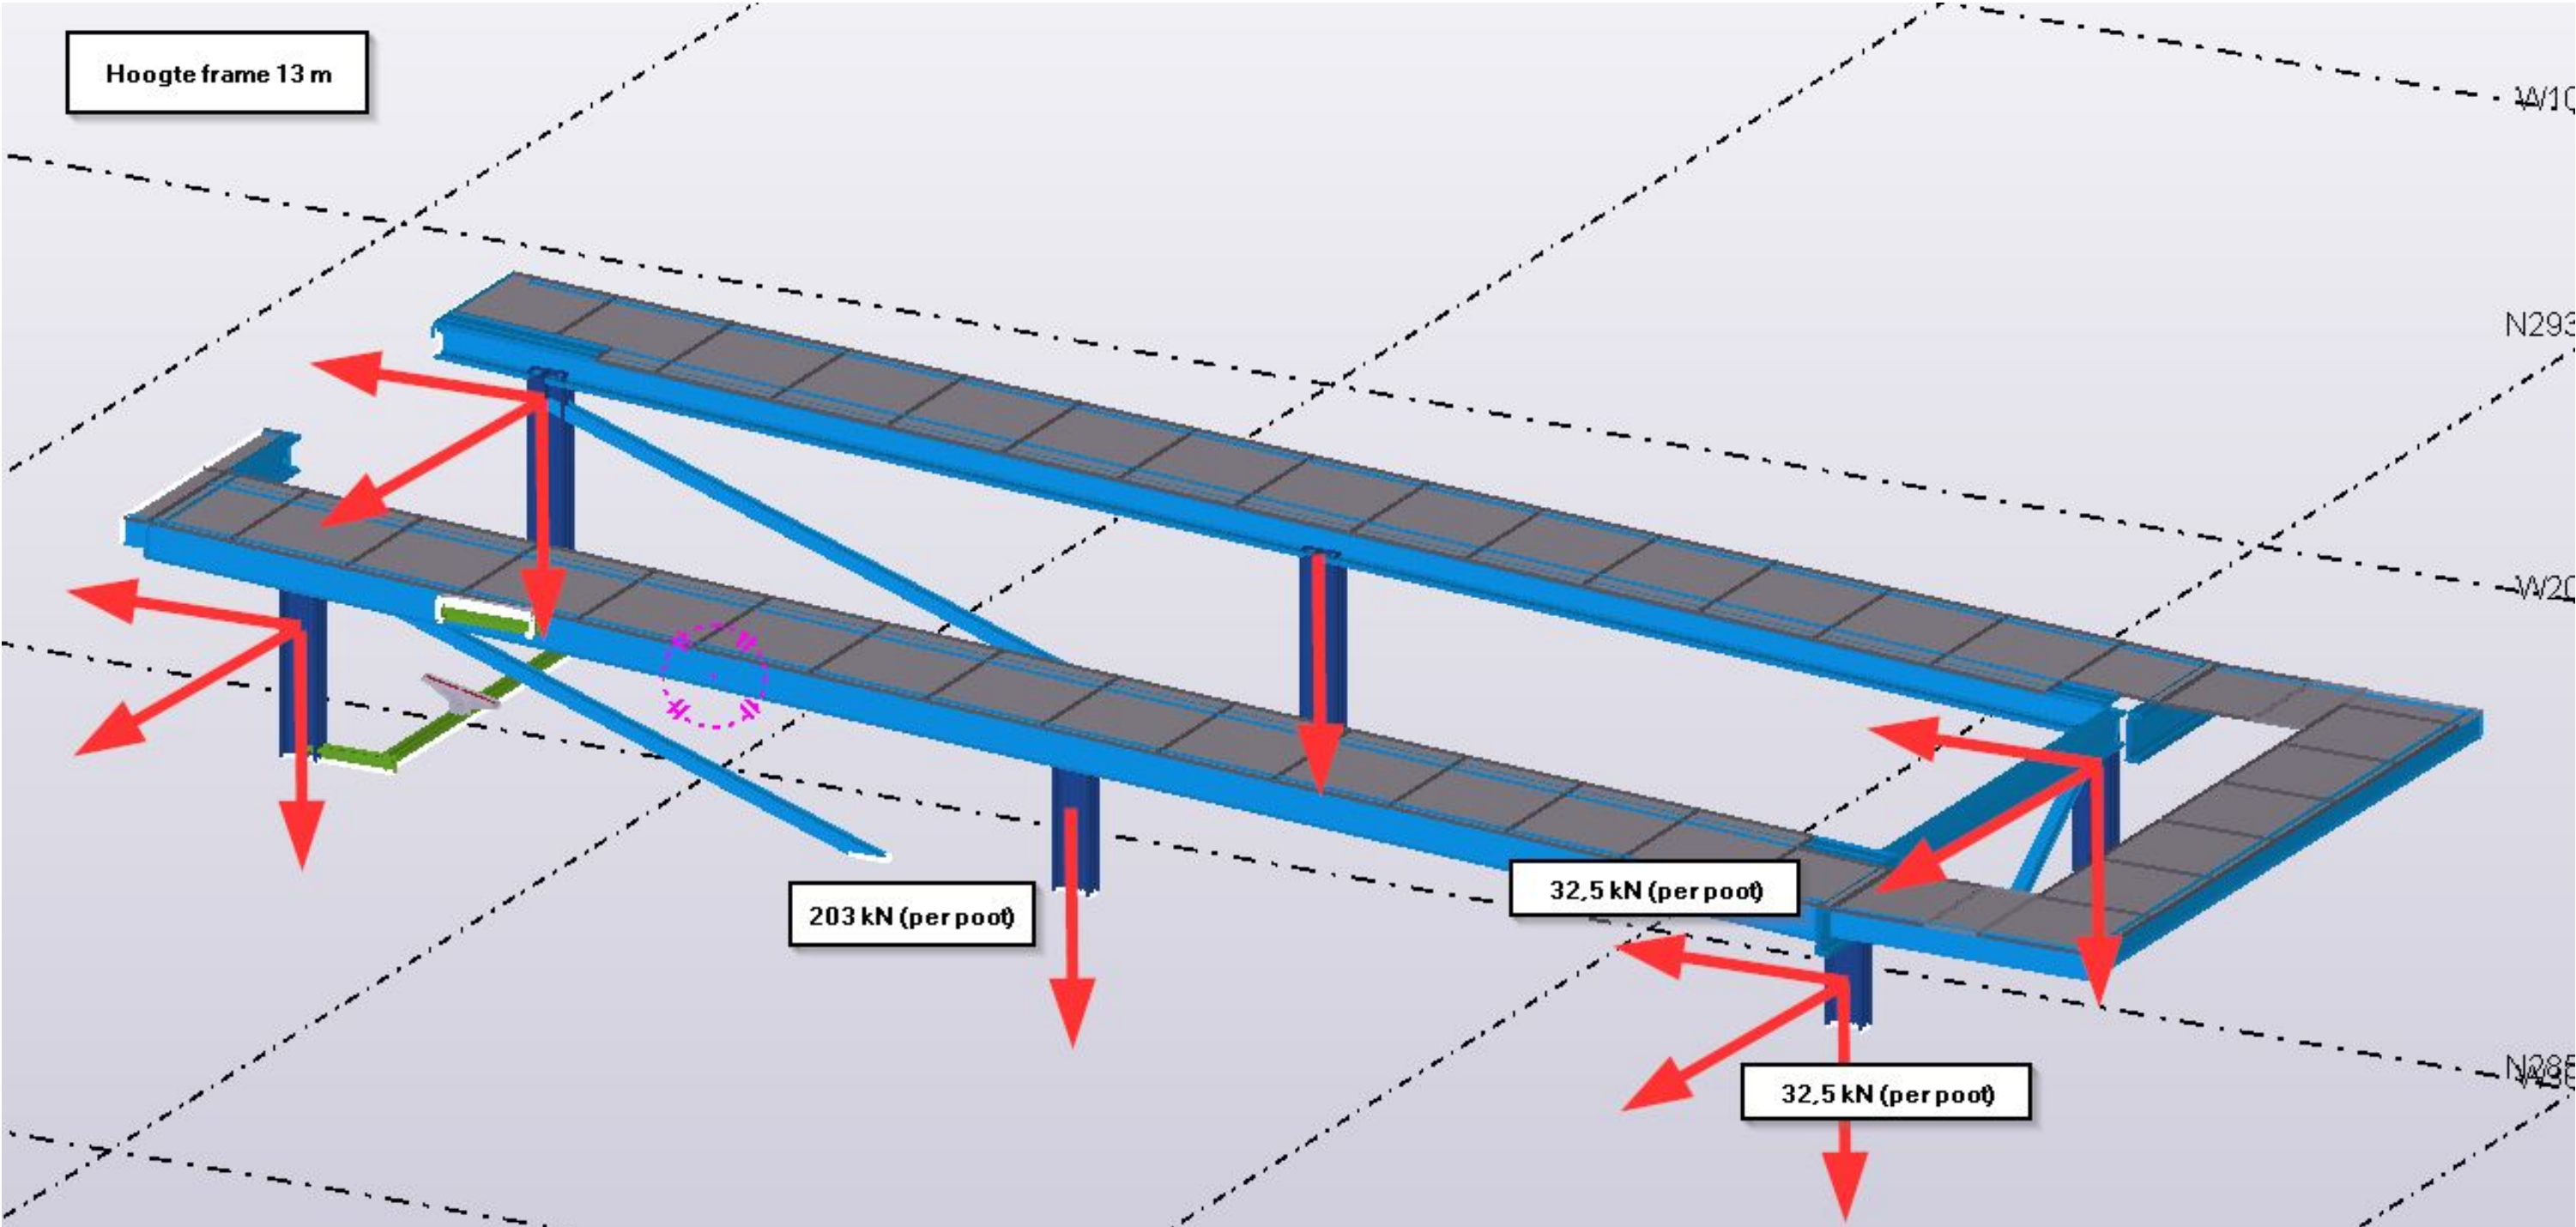


Belasting: 13EBD40 (Trommelzeef)

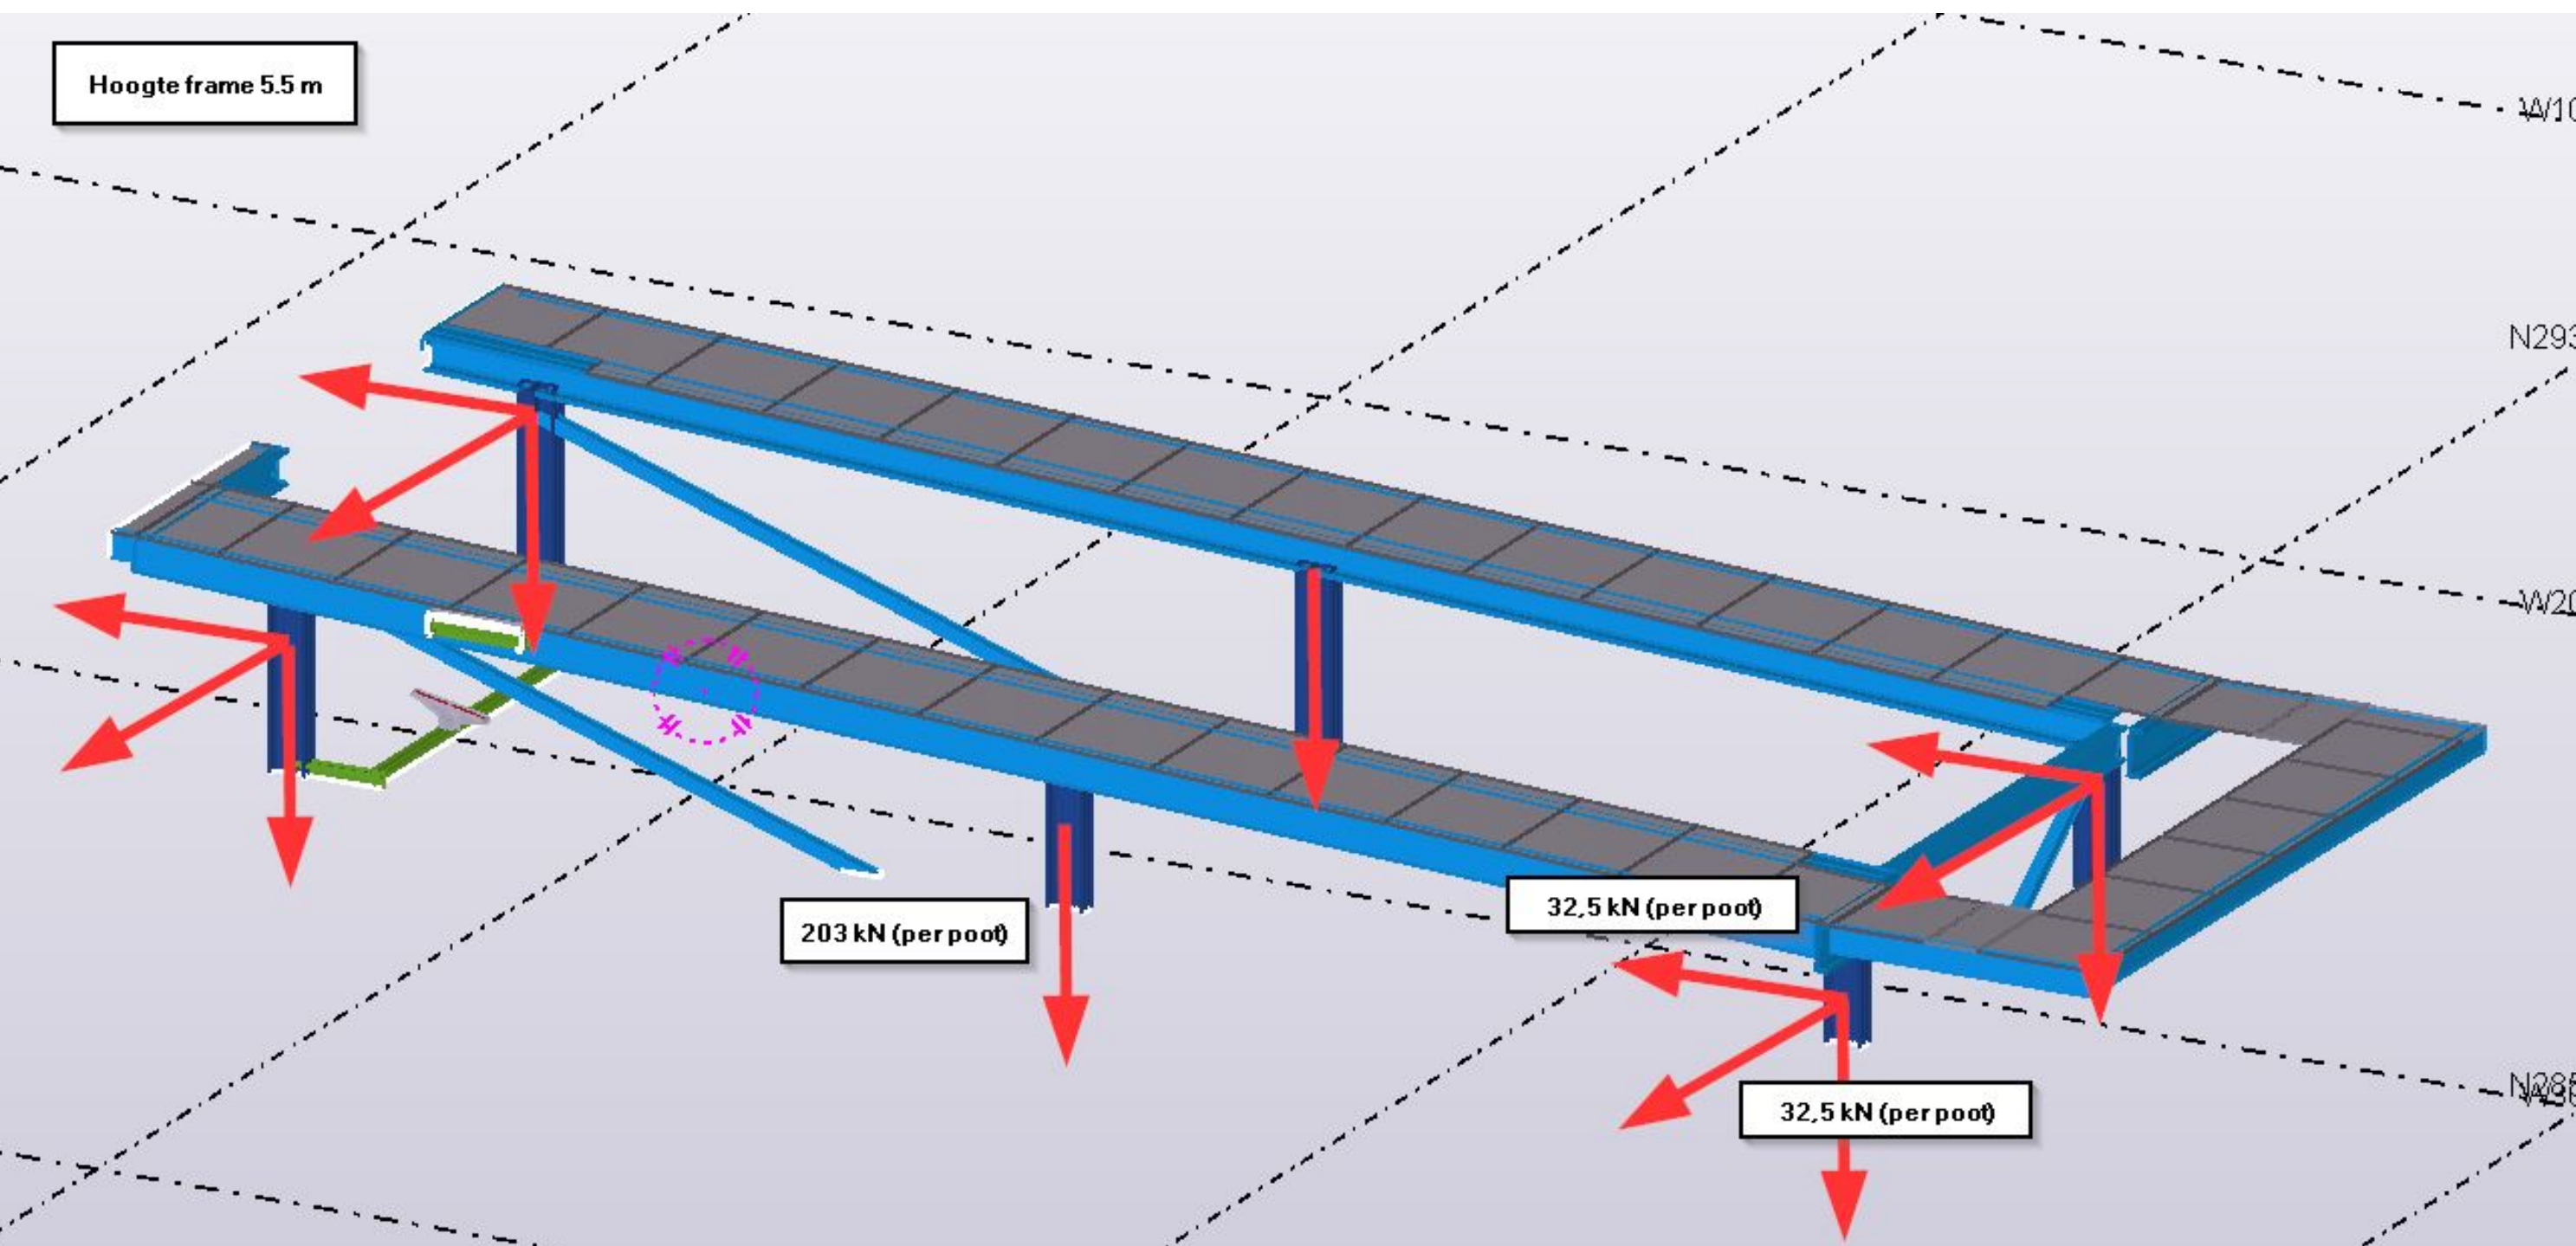

Belasting: 13EBF13 & 13EBF23 (Filter)

- Static Loading cases**
- 1 Dead load
 - 2 Operating load
 - 3 Live loads
 - 4 Snow load
 - 5 Wind actions Z
 - 6 Wind actions XZ
 - 7 Spectral

Note!
Loads just (typical)
The loads are overlay!

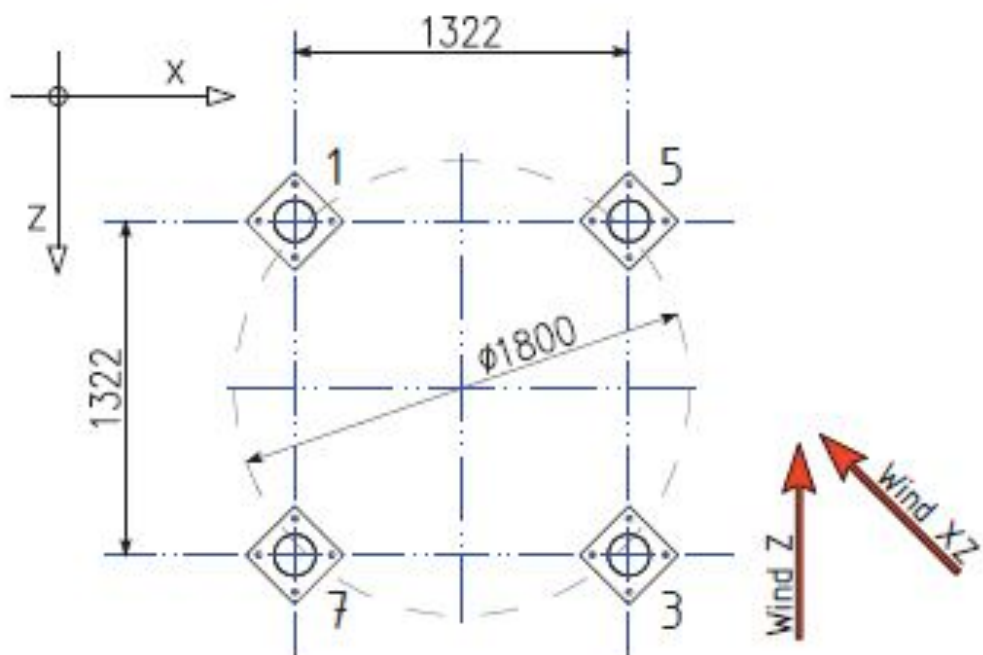

Node: 1						
LC	Fx [kN]	Fy [kN]	Fz [kN]	Mx [kNm]	My [kNm]	Mz [kNm]
1	0,010	11,400	0,010	0,017	0,000	-0,017
2	0,006	6,250	0,006	0,009	0,000	-0,009
3	0,003	2,990	0,001	0,011	0,000	-0,005
4	0,001	0,977	0,001	0,003	0,000	-0,001
5	0,009	10,700	1,700	1,200	0,000	-0,014
6	1,210	15,100	1,210	0,860	0,000	-0,860
7	±1,570	±3,610	±1,460	±1,000	±0,000	±1,070

Node: 5						
LC	Fx [kN]	Fy [kN]	Fz [kN]	Mx [kNm]	My [kNm]	Mz [kNm]
1	-0,010	11,400	0,010	0,017	0,000	0,017
2	-0,006	6,250	0,006	0,009	0,000	0,009
3	-0,003	2,990	0,001	0,011	0,000	0,005
4	-0,001	0,977	0,001	0,003	0,000	0,001
5	-0,009	10,700	1,700	1,200	0,000	0,014
6	1,190	0,000	1,190	0,841	0,000	-0,841
7	±1,570	±3,590	±1,460	±1,000	±0,000	±1,070

Node: 7						
LC	Fx [kN]	Fy [kN]	Fz [kN]	Mx [kNm]	My [kNm]	Mz [kNm]
1	0,010	11,400	-0,010	-0,017	0,000	-0,017
2	0,006	6,250	-0,006	-0,009	0,000	-0,009
3	0,000	0,013	-0,001	0,006	0,000	0,000
4	0,000	0,383	-0,001	0,001	0,000	-0,001
5	-0,009	-10,700	1,700	1,200	0,000	0,014
6	1,190	0,000	1,190	0,841	0,000	-0,841
7	±1,440	±3,670	±1,580	±1,060	±0,000	±0,984

Node: 3						
LC	Fx [kN]	Fy [kN]	Fz [kN]	Mx [kNm]	My [kNm]	Mz [kNm]
1	-0,010	11,400	-0,010	-0,017	0,000	0,017
2	-0,006	6,250	-0,006	-0,009	0,000	0,009
3	0,000	0,013	-0,001	0,006	0,000	0,000
4	0,000	0,383	-0,001	0,001	0,000	0,001
5	0,009	-10,700	1,700	1,200	0,000	-0,014
6	1,210	-15,100	1,210	0,860	0,000	-0,860
7	±1,440	±3,650	±1,580	±1,070	±0,000	±0,984

Statische belasting : 240 kN
Belasting per poot (12 stuks) : 20 kN

Fabricage en montage volgens
NEN-EN 1090-2:2018
Uitvoeringsklasse: XXX
Functionele tolerantie klasse: XXX