


AG

Aquaglide

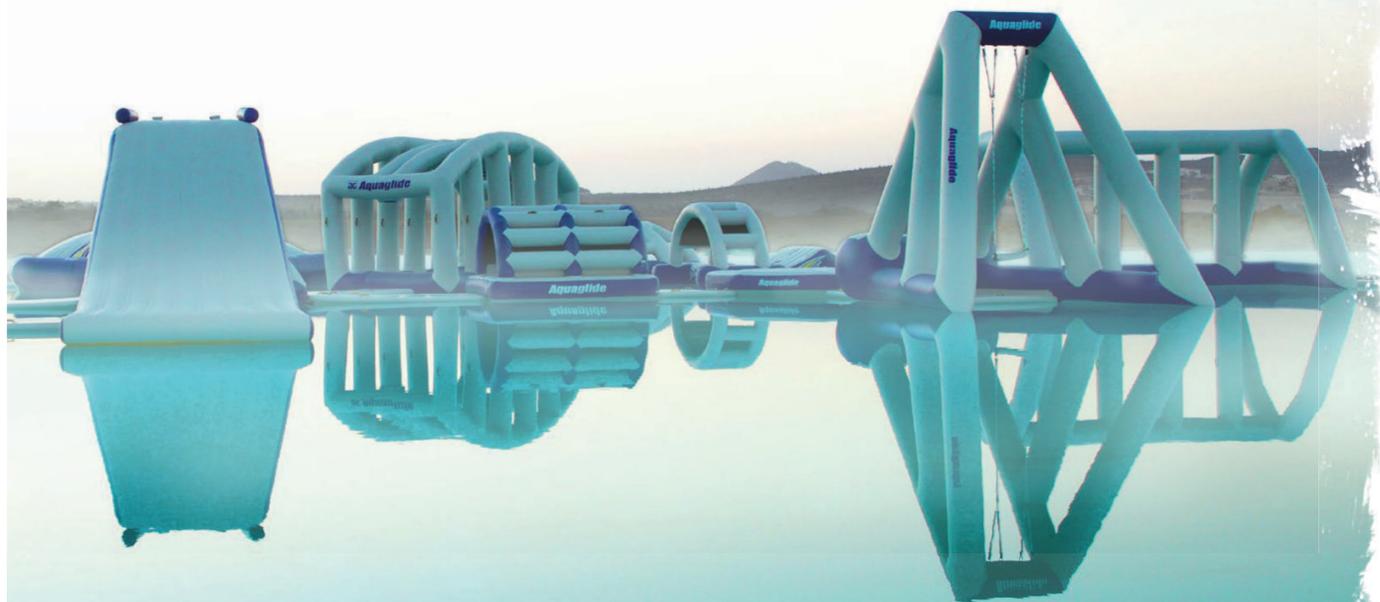

BERGEN OP ZOOM
AQUAPARK COLLECTION


BERGEN OP ZOOM LAYOUT

List of Components:


- 1 - Thor
- 1 - Everest
- 1 - Summit
- 1 - Skyrocket
- 1 - Jungle Joe 2
- 1 - Anvil
- 1 - Freefall Supreme
- 1 - Loki
- 1 - Kaos
- 1 - Arena 30
- 1 - Supertramp 23
- 1 - Catapult
- 1 - i-Hop
- 1 - Monkey Dome
- 1 - Neptune
- 1 - Foxtrot
- 1 - Jungle Jim
- 1 - King of the Mountain
- 1 - Parkway 20
- 2 - Blockade 10
- 1 - Subway 10
- 2 - Overpass 10
- 1 - Sierra 10
- 1 - Vista 10
- 1 - Lugeway 10
- 1 - Parkway 10
- 1 - Barricade 10
- 1 - Lugeway 20
- 6 - Universal Connection
- 3 - Universal Lifeguard Station
- 1 - Universal Thunderdome
- 1 - Escalade Summit
- 2 - Blast Bag
- 1 - Walk on Water
- 6 - Speedway 20
- 4 - Speedway 10
- 4 - Splashmat
- 5 - Swimstep XL
- 14 - Swimstep 5x5

Overall Dimensions:

L 190' x W 195' (L 57,9m x W 59,4m)
Minimum Water Depth: 13.5' (4,10m)
Recommended Capacity: 291

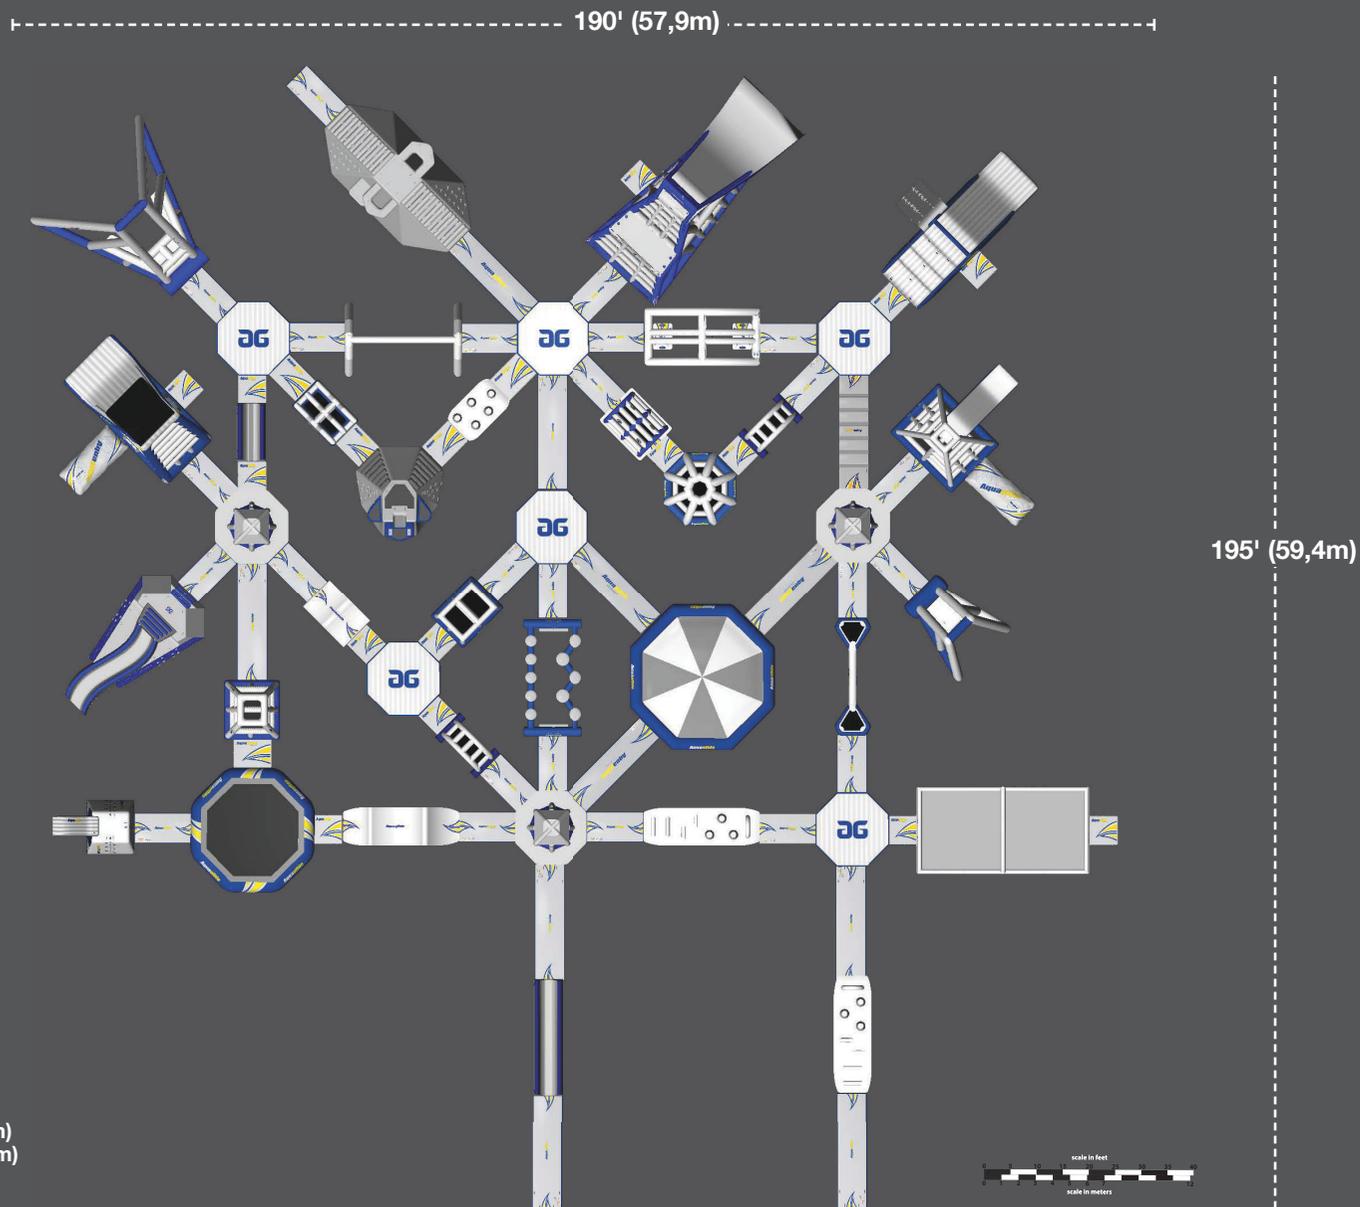


BERGEN OP ZOOM LAYOUT




BERGEN OP ZOOM LAYOUT



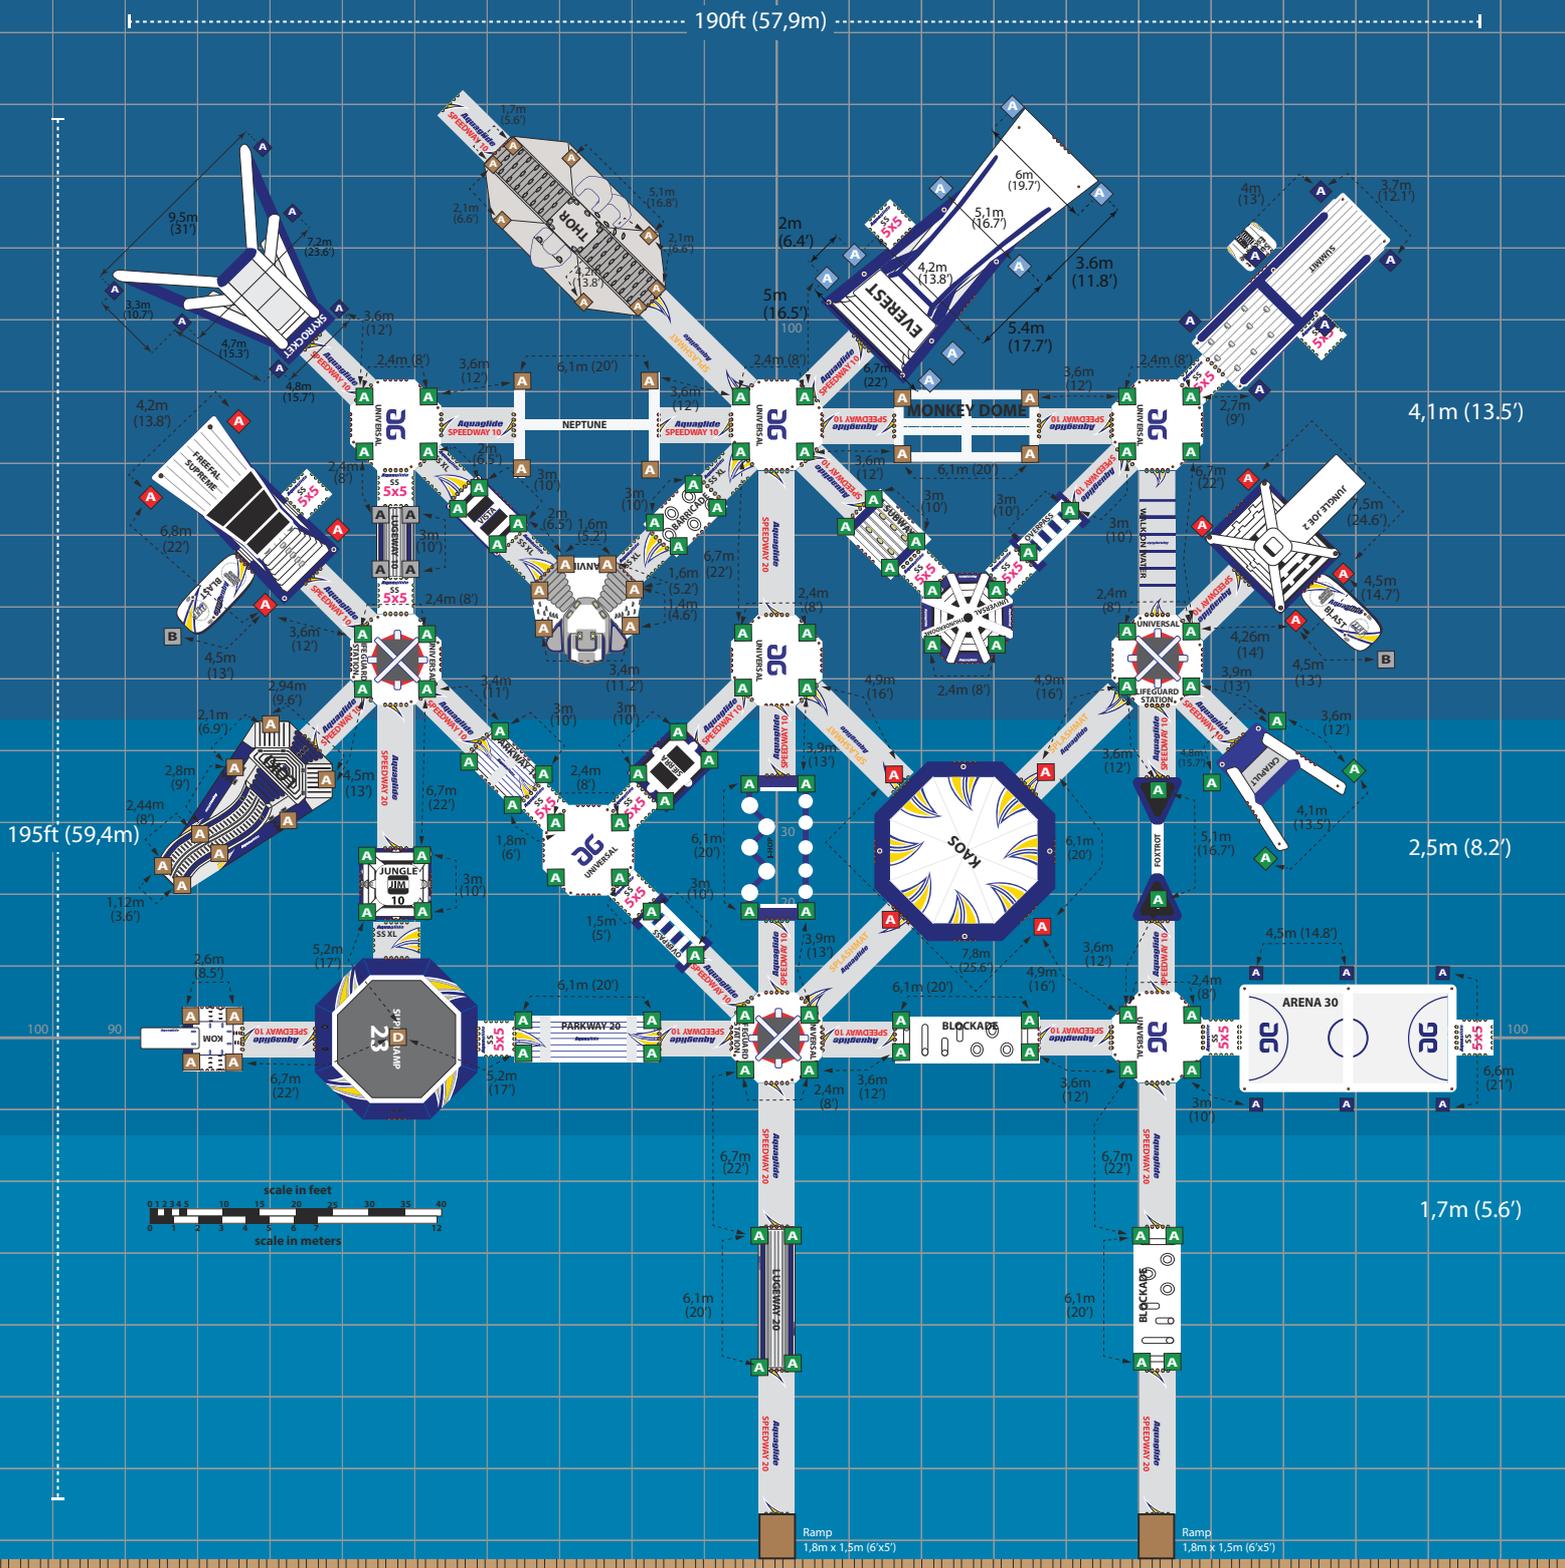

- = Anchor weight 250 kg / 550 lbs.
- = Anchor weight 500 kg / 1100 lbs.
- = Anchor weight 1000 kg / 2200 lbs.
- = Anchor weight 2000 kg / 4409 lbs.
- = Anchor weight 3000 kg / 6600 lbs.
- = Anchor weight 4000 kg / 8800 lbs.

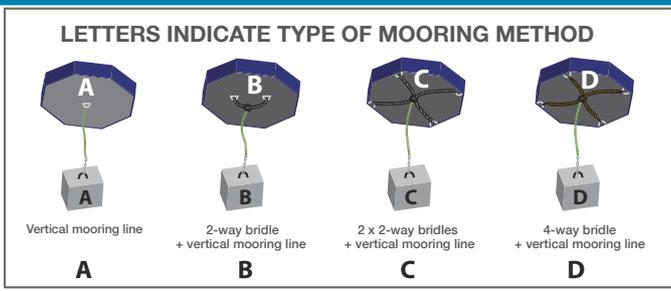

- 06 - Anchor weight 250 kg / 550 lbs.
 - 94 - Anchor weight 500 kg / 1100 lbs.
 - 35 - Anchor weight 1000 kg / 2200 lbs.
 - 12 - Anchor weight 2000 kg / 4409 lbs.
 - 18 - Anchor weight 3000 kg / 6600 lbs.
 - 08 - Anchor weight 4000 kg / 8800 lbs
 - 173 - 1-meter vertical mooring line
 - 02 - 2-way mooring bridle
- Square gray grids are 3,05m (10 feet)



MAKING WATERSPORTS FUN FOR OVER 30 YEARS



The Aquaglide brand has been pioneering innovative ways to have fun on the water for over 30 years. During that time we've earned a reputation, not only for unique and exciting products, but for quality and integrity too.

Over the past decade, Aquaglide has also come to be known as the leader in commercial watersports fun. Our inflatable aquapark systems have changed the face of commercial recreation, and promise to continue that transformation into the next decade as well.

Every aquapark product we make is intended for long-term durability, even under the heavy demands of camp, resort and commercial use, yet is also suitable for residential purposes. Aquaglide designs are carefully vetted and constantly refined based on years of feedback from our global network. Each product is designed and third-party tested to meet the highest standards in quality and product safety.

Designed in the U.S. Pacific Northwest region and tested globally, our mission is to build unique, exciting inflatable aquapark structures that can be used as stand-alone features, or added upon to create the ultimate water playground. Above all, our most satisfying goal is to share the excitement of fun on the water.

AG
Aquaglide

WHAT MAKES AQUAGLIDE THE BEST

Aquapark selection is a big decision. Here are some important points to consider before making your choice.

SUPERIOR DESIGN AND INNOVATION SETS US APART



Aquaglide helped lead the rapid evolution from basic water trampolines to the incredible Aquaparks we have today. Early in the process our design team developed one of the first in-water attachment systems to allow secure modular connections. Called Vario Interloc, this system is the foundation of every Aquaglide park because it allows secure connections to be made quickly and easily. Once our designers released innovative play structures like Summit Express and Jungle Joe, the concept of a modern Aquapark began to emerge, and the next step was to interconnect these massive structures. Although seemingly simple, our team pushed technological boundaries to develop the Speedways in a construction that would stand up to the incredible abuse of the commercial setting. The Speedways led to increasingly complex pathways between even more innovative feature items, all with Aquaglide's unique flair for fun. Aquaglide's relentless pursuit for excitement continues to lead to new innovations like the Universal Monsoon, the Skyrocket, the Monkey Dome and our new Everest play station. Ultimately, it is our passion for innovative design that drives us to continually push the boundaries of what is possible.

INSPIRE CREATIVE FREE PLAY

Aquaglide products are designed to inspire creative free play. Participants entertain themselves, so less staff is required to constantly oversee organized games and activities. As you look through this catalog you will clearly see that, for us, the fun begins with innovations in product design. Our incentive for creating better solutions is the inspiring feedback we receive from valued customers, like you, who use and appreciate our products every day.

SUPERIOR VALUE

When considering Aquaparks, it is important to analyze the return on your investment over a 3 to 5-year period, not just the initial cost. Sure, you can find cheaper alternatives with copies of some of our items, but most are likely to last less than one season. An Aquaglide Aquapark will outlast any copycat brand 3 to 1. That means three times the lifespan, and a larger and faster ROI. Less problems, less repairs, less PVC in the landfill, and less hassle. That is what you get when you choose Aquaglide.

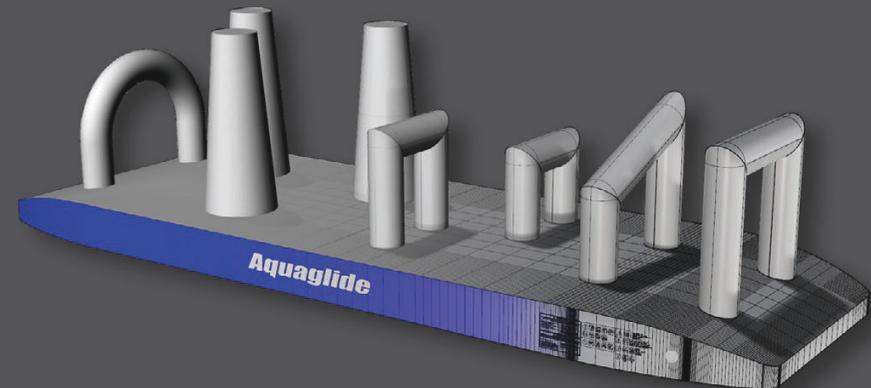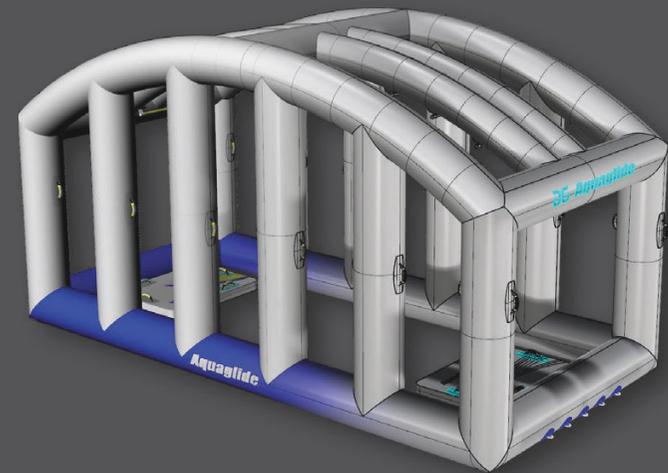


SUPERIOR MATERIALS

Duratex is the best quality material for commercial Aquaparks, period. Aquaglide works directly with material suppliers to develop exclusive, purpose-built materials. Aquaglide's product range offers the most refined, technologically superior materials on the planet.

SUPERIOR CONSTRUCTION

Superior materials enable exceptional construction techniques. High-quality seam construction is absolutely essential for ensuring the durability and functionality of any commercial Aquapark. That's why all of Aquaglide's seams are hot air-welded, not glued. Our premium Duratex material allows a thicker coating of PVC which ultimately results in higher-quality welds for increased durability and even better airtightness.

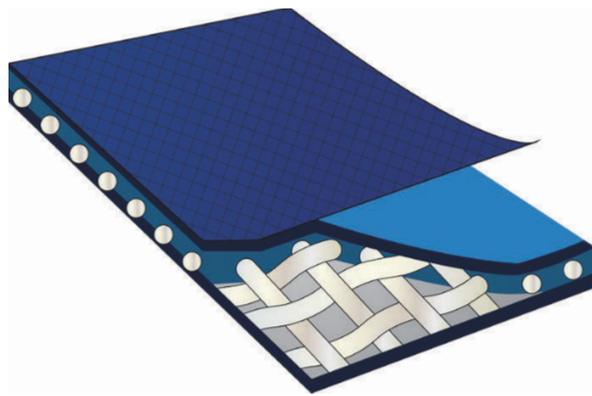


Duratex Material

RELENTLESS REFINEMENT

We continually analyze and improve materials, product specifications and construction techniques based on feedback from commercial Aquaparks around the globe.

- All Aquaglide play structures and I-Beam connectors now use a thicker, more durable Duratex formulation that we call Cx3. Developed to stand up to the rigors of ultra-heavy commercial use, the upgrade to Cx3 means thicker material with 1000d polyester core, better elasticity, superior adhesion and maximum UV protection.
- All Aquaglide Dropstitch connectors are now hot-air welded with 3-layer seams and ultra-durable 2-layer fused construction for maximum longevity. No other brand offers this exclusive technology.

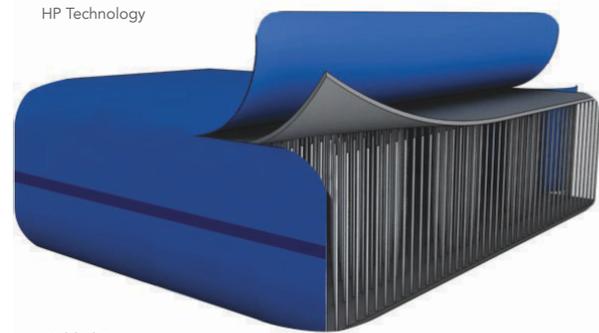

Welded Seams

3-YEAR WARRANTY

We stand behind our products. Aquaglide commercial products are not only better built, they are also backed by a 3 year warranty against any defect in material or workmanship. Do the research; you cannot find better products or better support.



THIRD-PARTY CERTIFICATION

Each and every Aquaglide product is submitted to extensive lab and field-testing to ensure that it meets and exceeds the most rigorous product safety standards on the planet. Our products are third-party certified compliant with CPSIA and ISO/EN 25649, the highest possible standards in the business. We strongly encourage customers to ask for proof of compliance when considering any supplier.

TRUST

At Aquaglide we don't just build products, we build trust. This is a process that can only be done only by forging long-term partnerships with real people; in this case everyone from manufacturing suppliers to the end consumer. When you make the decision to purchase Aquaglide you can trust that you will receive safe, high quality products and the highest level of service available.

THE AQUAPARK ADVANTAGE

Aquaglide components have always been designed to easily interconnect. We are proud to have developed a connection system that has proven to be a game changer for our industry. Our Universal Connection System allows unlimited park designs. This octagon shaped platform allows our Speedway and Swimstep connections to connect to all eight sides at once offering multiple angles and unlimited possibilities for Aquapark design. The Universal can be used as a hub, a corner or anything in between. Park layouts can be changed quickly and easily which allows your Aquapark to evolve, so adding new exciting components is easy. With our system, you are able to start with our smallest Aquapark layout, and then use all the existing components as your Aquapark grows larger.



HIGH PRESSURE TECHNOLOGY (HP)

Our HP construction utilizes high quality dropstitch material that can withstand an internal pressure of up to 20 psi (1,4 bar) without damage. This is 4 times the design working pressure! Here we use the HP material at a very acceptable 5 psi (0,34 bar), keeping it so far below its break strength that durability is never an issue.

These products are subject to extreme abuse from toes, heels, knees & elbows. They also take the worst of daily pressure extremes due to thermal expansion from the sun.

Another advantage of HP material is that it offers a smooth, flat, low-profile platform that is much easier to board from the water.

MOORING


Correct mooring is critical to the success of any aquapark. Improper mooring may cause excessive wear and can potentially be dangerous. All Aquaglide commercial products are designed with heavily reinforced stainless steel anchor rings. In addition, our mooring system is built around strong, flexible elastic mooring lines designed to minimize shock-loading and keep the aquapark in place no matter what the conditions.

Each Aquaglide park includes a mooring diagram which represents our best recommendation for anchoring your aquapark. Although not typically difficult, there are an incredibly wide range of variables to consider in setting up the proper mooring for a given site. We suggest starting with these guidelines and discussing your site specifics with your Aquaglide sales advisor, local mooring expert, or an Aquaglide 3rd party installation technician.

A few points about these guidelines:

- Our typical mooring guidelines incorporate vertical mooring lines for each anchor ring with an anchor or ground screw at the base. This is by far the most common setup.
- Aquaparks in deeper water or with significantly exposed anchorages may be better to use a bridled system. This option should be specified by the customer or sales advisor based on site specifics.
- Our minimum weight recommendations are based on sites with average conditions whereas aquaparks sited in areas with the potential for more extreme weather, strong tides, currents, winds and/ or swell should consider using up to 50% additional weight or holding power. Here again, where these types of challenging conditions exist they should be spelled out by the customer or sales advisor.
- Our mooring diagrams specify the minimum anchor weight 'or equivalent holding power.' This means that in some situations the use of ground screw anchors may be preferred. This decision can be made by discussing the site specifics with an Aquaglide sales advisor, mooring expert or installation tech. Typically areas with rocky seabed require weighted anchors while ground screws do best in densely packed sand, silt or mud.

Regardless of whether you use Aquaglide's turnkey installation service, a managed installation, or choose to install the park yourself, we are there to help ensure the job is done right! Please don't hesitate to contact us with any questions regarding proper installation of your Aquaglide products.

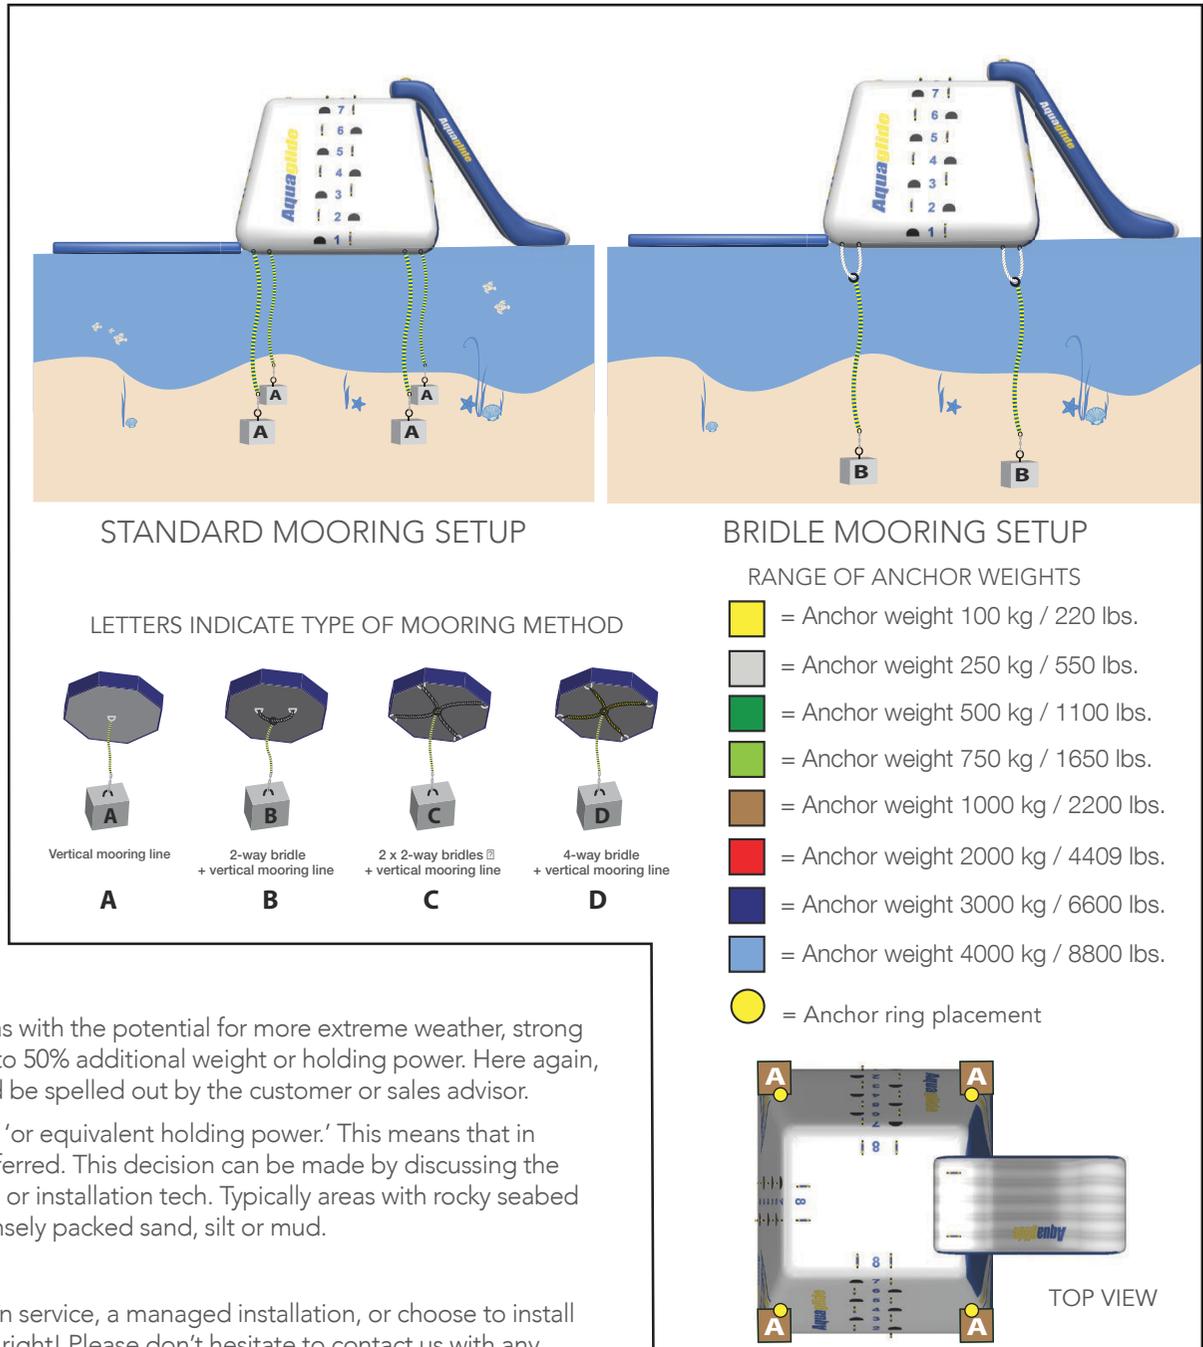

EVEREST

Aquaglide

Signature Aquapark Feature

US MAP: \$22,999.99

Item Number: 585219625

SKU: 0790628042116

Dimensions: L 39' x W 16.3' x H 20.6'
(L 12m x W 5m x H 6,3m)

Box Dimensions:

L 63" x W 50" x H 40", 1103 lbs.
(160cm x 127cm x 100cm, 500 kg)

As the tallest and most thrilling structure in the Aquaglide commercial line, Everest is an attention-grabbing marquee Aquapark piece or standalone feature. At over 20 feet high, the Everest features a wide zero-entry slide that enables multiple users at once, multiple climbing lines, and a sizeable interior play structure for bouncing, climbing, hiding, and resting. Use the Everest as a standalone focal point, or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.



Includes:

- Everest
- 4 Vario Lock Straps
- Repair Kit

Not Included:

- Anchor weights
- mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding, climbing, playing, bouncing, and hiding.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3, 8cm dropstitch


Construction:

Double I-Beam w/ tubular - welded 3 layer - integrated DS w/ welded seamconstruction with 3-layer seams

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

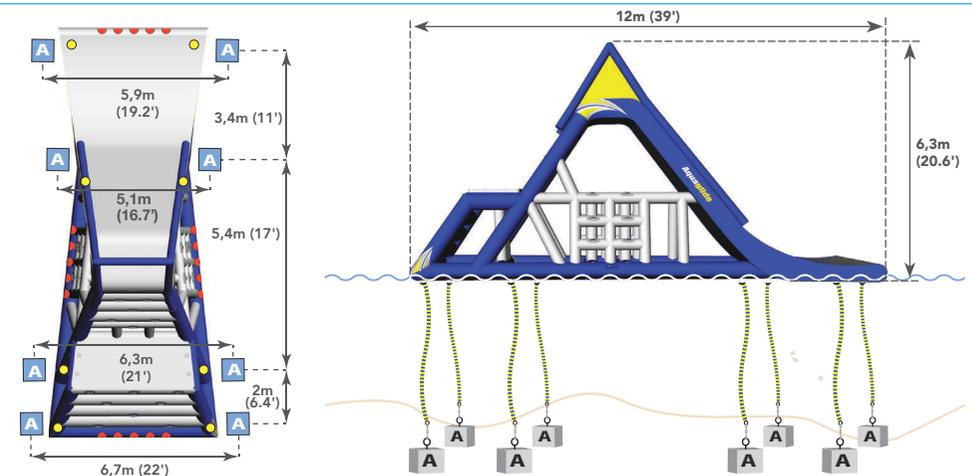

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
12 12	726 kg (1600 lbs.)	4,1m (13.5 ft)	4,5m (15 ft)	32,000 kg (70,400 lbs.)	4000 kg (8800 lbs.) or equivalent holding	8	8	8	5 5 5 5	4 VARIO LOCK CINCH STRAPS	MAIN [1]1.7 psi (0.117 bar) SLIDE [2]0.9psi (0.062bar), PLATFORM [3]5psi (0.345bar), TUBEST[4], [5]2.0psi(0.137bar)

THOR

US MAP: \$14,999.99

Item Number: 585222150

SKU: 0790628045995

Dimensions: L 30' x W 15' x H 12.7'
(L 9,1m x W 4,6m x H 3,9m)

Box Dimensions:
TBD

Aquaglide

Signature Aquapark Feature



Thor presents a towering spectacle with huge capacity and diverse features to keep users charging back for more. Two novice up-down climbing routes utilize Tritex material for traction and cooling effects. Once the formidable ascent is made, users choose from one of three jumping platforms located at 9' H (2,74 m), 12' H (3,66m) and 12.7' H (3,87m) respectively. Two integrated high-velocity chute slides and two angled drop slides provide (slightly) milder descent options. Once in the water, avid climbers can test their skills on one of two advanced climbing lines ascending from the water. Connects to any aquapark using Aquaglide's Interlock system. Ideally positioned in the center of a track run, Thor also makes an excellent stand-alone item.

Includes:

- Thor
- Repair Kit

Not Included:

- Anchor weights
- mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing and jumping as a high-excitement signature item.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3, 8cm dropstitch


Construction:

Double I-Beam/ I-Band

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

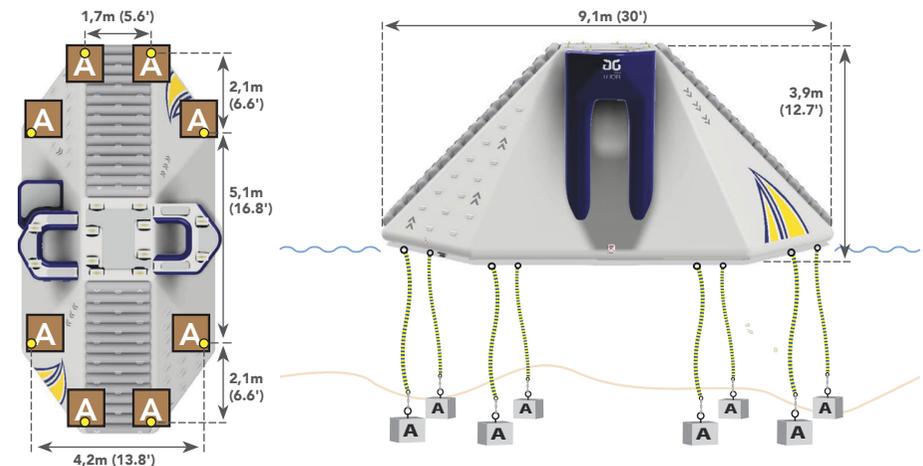

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
12 12	1088 kg (2400 lbs.)	2,84m (9.3 ft)	4,5m (15 ft)	8000 kg (17,600 lbs.)	1000 kg (2200 lbs.) or equivalent holding	8	8	8	515	0	MAIN [1] 0.4 psi (0,028 bar), PLATFORM [2] 1.2psi (0,083bar),

FREEFALL SUPREME

Aquaglide

Signature Aquapark Feature

US MAP: \$13,499.99

Item Number: 585219626

SKU: 0790628042123

Dimensions: L 25.6' x W 12.4' x H 16.6'
(L 7,8m x W 3,8m x H 5,1m)

Box Dimensions:

L 52" x W 39.3" x H 38.6", 547 lbs. 1pc.
(L 132cm x W 100cm x H 98cm, 248 kg)

As one of the most popular pieces in the Aquaglide commercial line, the Freefall Supreme creates a visual spectacle. At over 16 feet high, the Freefall Supreme features a zero-entry slide that enables multiple users at once, two climbing lines, and a sizeable interior play structure for bouncing, climbing, swinging, and hanging out. Use the Freefall Supreme as a standalone focal point, or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.



Includes:

- Freefall Supreme
- Repair Kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding, climbing, playing, bouncing, and hiding.

Warranty:

Limited 3-year Warranty

Material:

Material – 0.90 mm / 31 oz Cx3


Construction:

Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

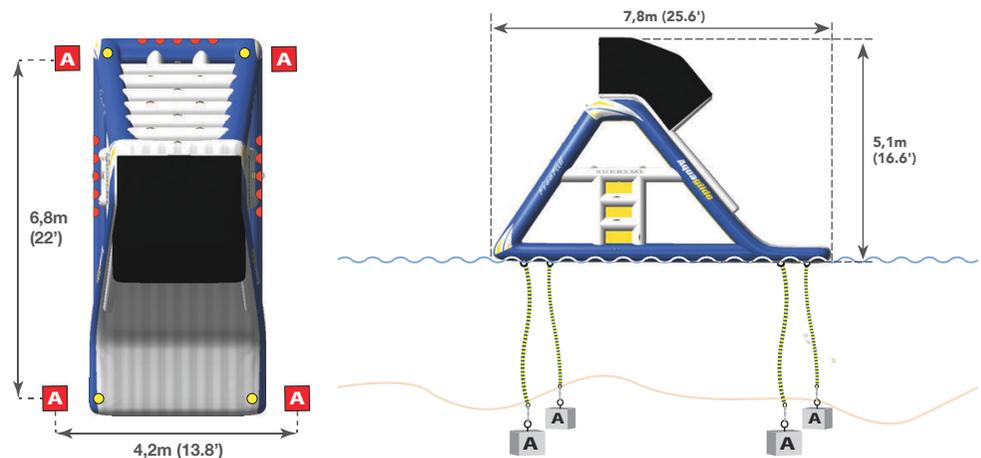

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE MAIN [1] 1.8 psi (0,124) bar, SLIDE [2] 1.0 psi (0,069) bar, TOP TUBES [3] 1.8 psi (0,124) bar
12 12	1134 kg (2500 lbs.)	3,34m (11ft)	4,5m (15ft)	8000 kg (17,636 lbs.)	2000 kg (4409 lbs.) or equivalent holding	4	4	4	5 5 5	

SUMMIT EXPRESS

Aquaglide

Signature Aquapark Feature

US MAP: \$10,999.99

Item Number: 585219627

SKU: 0790628042130

Dimensions: L 30' x W 9' x H 16'
(L 9m x W 2,7m x H 5m)

Box Dimensions:

L 52" x W 43" x H 39", 661 lbs. 1pc.
(L 131cm x W 109cm x H 99cm, 300 kg)



Slightly shorter than the Freeroll Supreme and not quite as long as the Everest, the Summit Express still provides plenty of opportunity for play. It features a zero-entry slide that enables multiple users at once and a sizeable cave below the slide for playing, bouncing, swinging, and resting. The Summit Express can be used as a standalone focal point feature or connected to other Aquaglide Aquapark features using the D-Ring Interloc system.

Includes:

- Summit
- Repair Kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding, playing, bouncing, hanging, and relaxing.

Warranty:

Limited 3-year Warranty

Material:

Material – 0.90 mm / 31 oz Cx3

Construction:



Double I-Beam w/ tubular - welded 3 layer seam

Slide Height: 12'2" (3,71m)

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

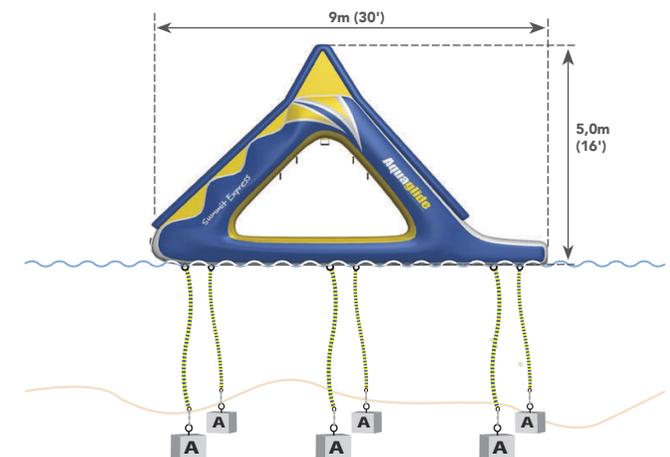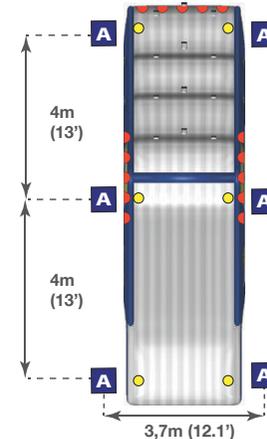

USERS
ADULT / CHILD

12 | 12

MAX WEIGHT
CAPACITY KG | LBS.

1134 kg
(2500 lbs.)

MINIMUM
WATER DEPTH

3,34m
(11ft)

MIN. DISTANCE AWAY
M | FT

4,5m
(15ft)

MIN. TOTAL
ANCHOR WEIGHT *

18,000 kg
(39,600 lbs.)

ANCHOR
WEIGHT

3000 kg
(6600 lbs.)
or equivalent holding

NUMBER OF
ANCHOR WEIGHTS

6

ANCHOR
RINGS

6

VERTICAL
MOORING LINES

6

D-RINGS

5 | 5 | 5

WORKING
PRESSURE

MAIN [1]
0.6 psi (0,041 bar),
SIDE TUBES [2]
1.8 psi (0,124 bar),
TOP TUBE
[3] 1.8 psi (0,124 bar)

ANVIL

Aquaglide

Signature Aquapark Feature

US MAP: \$9,999.99

Item Number: 585222101

SKU: 0790628045988

Dimensions: L 16' x W 15' x H 10'
(L 4,9m x W 4,6m x H 3,1m)

Box Dimensions:
TBD

Add serious thrills with this large corner jump feature. Two novice up-down climbing routes utilize Tritex material for traction and cooling effects. Once on top users choose from three jumping platforms, two located at 8' H (2,44m) and one at a towering 10' H (3,1m). The main platform features a high-velocity chute slide option for a (slightly) milder descent than a full standing jump. The inside corner offers an exciting 8' (2,44m) tall drop slide while avid climbers test their skills on two advanced lines ascending from the water on the outside corners. Connects to any aquapark using our D-Ring Interlock system. Ideally positioned as a corner on Ring or Serpentine parks, this item can also be used as a stand-alone. Connects on two sides using our Interlock connection system.



Includes:

- Anvil
- Repair Kit

Not Included:

- Anchor weights
- mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Jumping and climbing, plus transit to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam/ I-Band

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

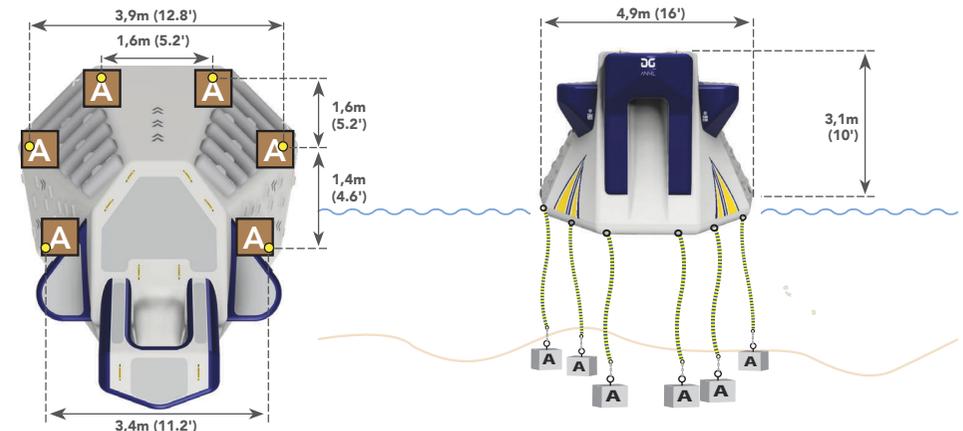

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	WORKING PRESSURE
8 8	726 kg (1600 lbs.)	2,43m (8 ft)	4,5m (15 ft)	6000 kg (13,200 lbs.)	1000 kg (2200 lbs.) or equivalent holding	6	6	6	515	0	MAIN [1] 0.4 psi (0,028 bar), PLATFORM [2] 1.2psi (0,083 bar), SMALL PLATFORM [3] 1.7psi (0,117 bar)

LOKI

Aquaglide

Signature Aquapark Feature

US MAP: \$12,499.99

Item Number: 585221113

SKU: 0790628042376

Dimensions: L 17.5' x W 15.1' x H 10.6'
(L 533cm x W 462cm x H 323cm)

Box Dimensions:

L 120cm x W 106cm x H 78cm, 272 kg

The Loki combines the excitement of a warped luge slide with two novice ladder walls, two mini-drops, and four advanced climbing lines. A center access format is used to reach the main luge slide via built-in ladder walls. Or users can take advanced climbing lines to reach the expansive cave area under the slide for a convenient place to lounge. The Loki accommodates up to 10 users and is ideal as a standalone feature or as part of any Aquaglide Circuit Aquapark layout configuration.



Includes:

- Loki
- Repair Kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Slipping, sliding, and lounging.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

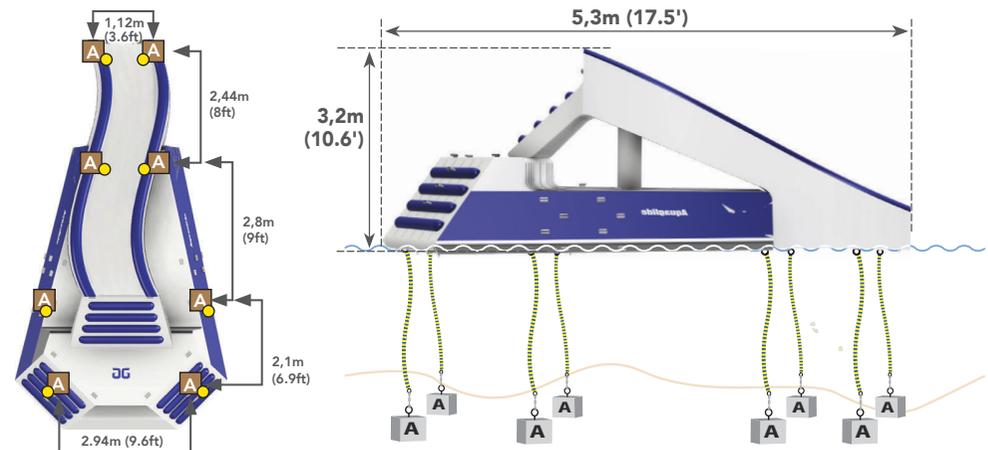

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
10 10	907 kg (2000 lbs.)	2,53m (8.3ft)	3,0m (10ft)	8000 kg (17,600 lbs.)	1000 kg (2200 lbs.) or equivalent holding	8	8	8	5	Main [1] 0.7psi (0,050bar) Slide [2] 1.5psi (0,103bar)

JUNGLE JOE 2

Aquaglide

Signature Aquapark Feature

US MAP: \$9,499.99

Item Number: 585219629

SKU: 0790628042154

Dimensions: L 21.6' x W 15' x H 12'
(L 6,6m x W 5,5m x H 3,8m)

Box Dimensions:

L 52" x W 43" x H 34", 415 lbs. 1pc.
(L 132cm x W 109cm x H 86cm, 188 kg)

Versatility is the name of the game with the Jungle Joe 2 feature. The pyramidal walls provide a climbing challenge for users of all ages. With multi-level terraces for exploration, zero-entry slide, and an engaging interior splash zone with soaker mesh floor, the Jungle Joe 2 has a little bit of everything. Use the Jungle Joe 2 as a standalone focal point, or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.



Includes:

- Jungle Joe 2
- Repair Kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, sliding, playing, jumping, and resting.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3

Construction:


Double I-Beam w/ tubular-welded 3 layer seam

Slide Height: 9'0" (2,74m)

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

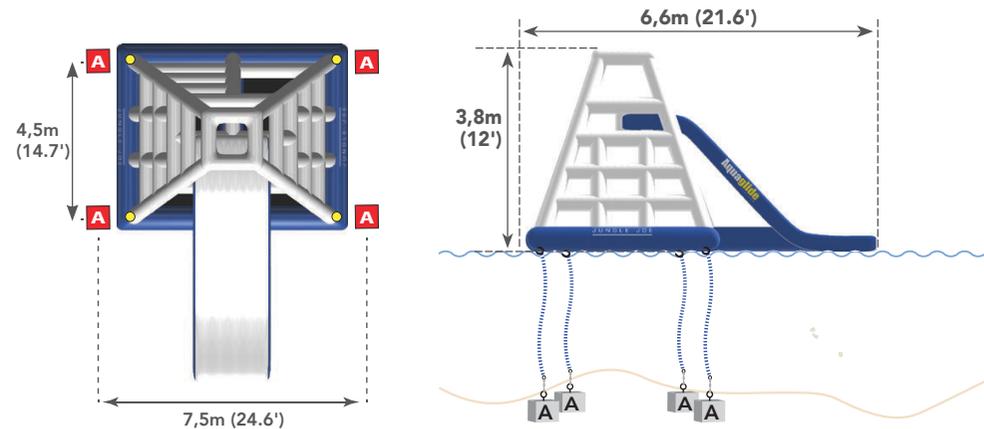

USERS
ADULT / CHILD

10 | 10

MAX WEIGHT
CAPACITY KG | LBS.

907 kg
(2000 lbs.)

MINIMUM
WATER DEPTH

2,78m
(9ft)

MIN. DISTANCE AWAY
M | FT

4,5m
(15ft)

MIN. TOTAL
ANCHOR WEIGHT *

8000 kg
(17,600 lbs.)

ANCHOR
WEIGHT

2000 kg
(4400 lbs.)
or equivalent holding

NUMBER OF
ANCHOR WEIGHTS

4

ANCHOR
RINGS

4

VERTICAL
MOORING LINES

4

D-RINGS

5 | 5 | 5

WORKING
PRESSURE

MAIN [1]
2.0psi (0,138 bar),
UPPER [2]
2.0psi (0,138 bar)
SLIDE [3]
1.2psi (0,082 bar)

JUNGLE JIM

US MAP: \$3,499.99

Item Number: 585219630

SKU: 0790628042161

Dimensions: L 10' x W 10.1' x H 6.8'
(L 3,1m x W 3,1m x H 2,1m)

Box Dimensions:

L 110cm x W 80cm x H 50cm, 80 kg

The Jungle Jim is a stable pyramid structure that features multiple options for climbing, sliding, jumping, and more. The climbing walls on this feature angle inward for convenience and stability, while an interior splash zone with soaker mesh floor provides secondary play options and a place to rest. Use the Jungle Jim as a standalone focal point, or connect it to other Aquaglide Aquapark features using the D-Ring Interloc system.



Aquaglide

Signature Aquapark Feature

Includes:

- Jungle Jim
- Repair Kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump
- Boarding platform

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, sliding, jumping, and resting.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

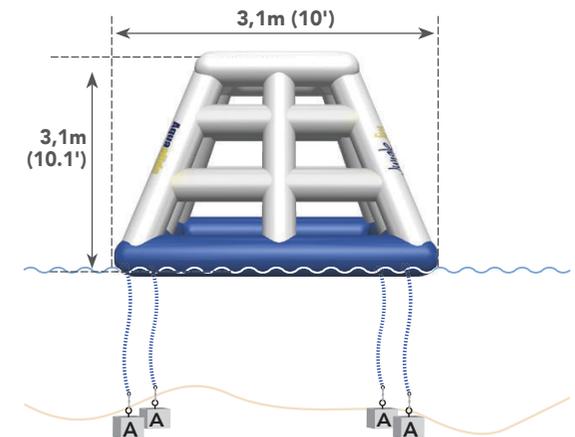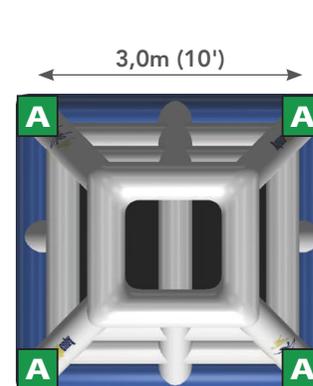

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
4 4	363 kg (800 lbs.)	1,94m (6.4ft)	4,5m (15ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	4	5 5 5 5	MAIN [1] 2,0psi (0,138 bar)

SKYROCKET

Aquaglide

Signature Aquapark Feature

US MAP: \$8,499.99

Item Number: 585220112

SKU: 0790628043373

Dimensions: L 26.3' x W 26.3' x H 26.3'
(L 8m x W 8m x H 8m)

Box Dimensions:

L 48" x W 40" x H 33", 452 lbs. 1 pc.
(L 120cm x W 100cm x H 82cm, 205kg)



The Skyrocket provides an exciting way for users to swing or launch themselves over the water. With an integrated swim platform and lounging area inside, the Skyrocket is a massive swing that launches users into a new dimension of water play for hours of high-flying fun. Climbing handles on the inside and outside make it easy to board from the water and climb onto the swing position. The Skyrocket works as a standalone feature or with any Aquaglide Aquapark configuration connected using the D-Ring Interloc system.

Includes:

- Skyrocket
- 5 Vario Lock straps
- Trapeze
- Swing seat
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Swinging.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam w/ tubular -
welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

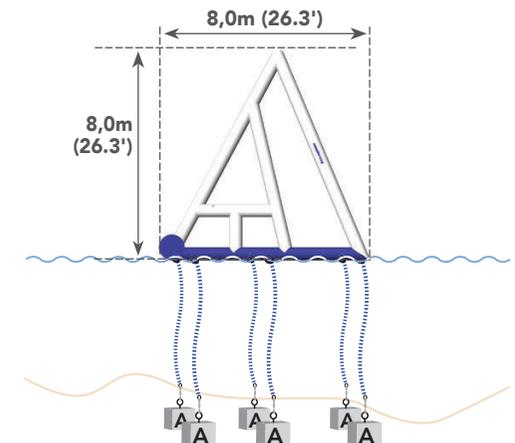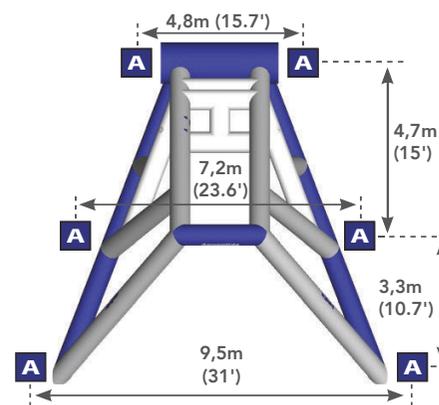

USERS
ADULT / CHILD

SWING: 1 | 1
LOUNGING:
5 | 5

MAX WEIGHT
CAPACITY KG | LBS.

726 kg
(1600 lbs.)
SWING:
272 KG
(600 lbs.)

MINIMUM
WATER DEPTH

3,66m
(12 ft)

MIN. DISTANCE AWAY
M | FT

4,5m
(15 ft)

MIN. TOTAL
ANCHOR WEIGHT *

18000 kg
(39,600 lbs.)

ANCHOR
WEIGHT

3000 kg
(6600 lbs.)
or equivalent holding

NUMBER OF
ANCHOR WEIGHTS

6

ANCHOR
RINGS

6

VERTICAL
MOORING LINES

6

D-RINGS

5

STRAPS

5

VARIO LOCK
CINCH STRAPS

WORKING PRESSURE
MAIN [1]
1.5 psi (0,103 bar)
TUBE [2]
1.5 psi (0,103 bar)
PLATFORM [3]
5.0 psi (0,345 bar)
PLATFORM [4]
5.0 psi (0,345 bar)

CATAPULT

US MAP: \$3,499.99

Item Number: 585220113

SKU: 0790628043380

Dimensions: L 16' x W 13' x H 15'
(L 4,8m x W 4m x H 4,6m)

Box Dimensions:

L 41" x W 31" x H 23", 200 lbs. 1pc.
(L 103cm x W 78cm x H 59cm, 91 kg)

The Catapult sends users swinging or launching themselves over the water. The Catapult presents a more approachable trapeze-style swinging experience than its larger counterpart, the Skyrocket. An integrated swim platform and molded climbing steps on the inside and outside make it easy to board from the water and climb onto the swing position. Use the Catapult as a standalone feature or connect to any Aquaglide Aquapark configuration using the D-Ring Interloc system.



Aquaglide

Signature Aquapark Feature

Includes:

- Catapult
- 5 Vario Lock straps
- Trapeze
- Swing seat
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Swinging.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Tubular - welded 3 layer seam -
integrated DS w/ welded seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

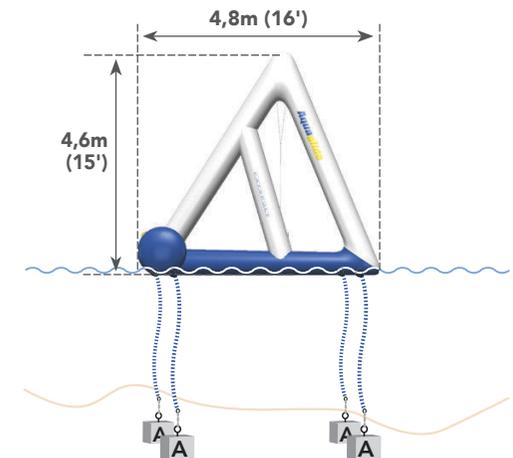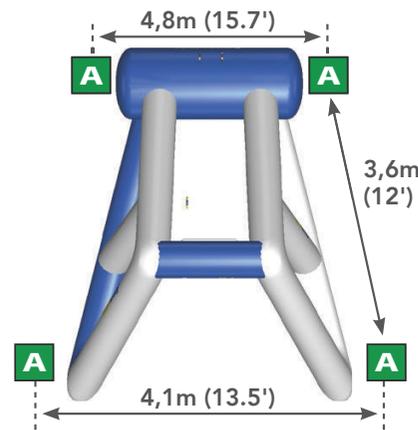

USERS
ADULT / CHILD

1 | 1

MAX WEIGHT
CAPACITY KG | LBS.

**363 kg
(800 lbs.)**

MINIMUM
WATER DEPTH

**2,44m
(8ft)**

MIN. DISTANCE AWAY
M | FT

**4,5m
(15ft)**

MIN. TOTAL
ANCHOR WEIGHT *

**2000 kg
(4400 lbs.)**

ANCHOR
WEIGHT

**500 kg
(1100 lbs.)**
or equivalent holding

NUMBER OF
ANCHOR WEIGHTS

4

ANCHOR
RINGS

4

VERTICAL
MOORING LINES

4

D-RINGS

5 | 5 | 5

WORKING
PRESSURE

MAIN [1]
1.74psi (0,119 bar),
[2] 1.74psi (0,119 bar),
[3] 5.0psi (0,345 bar)

KING OF THE MOUNTAIN

Aquaglide

Signature Aquapark Feature

US MAP: \$5,399.99

Item Number: 585219620

SKU: 0790628042062

Dimensions: L 14' x W 9' x H 6.6'

L 4m x W 2,7m x H 2m

Box Dimensions:

L 51" x W 30" x H 20", 197 lbs. 1 pc.

L 130cm x W 76cm x H 50cm, 89,5 kg

King of the Mountain is a challenging structure with climbing walls located on multiple sides. Users can race to the top of the semi-pyramidal structure using handholds or rope, then jump or descend using the attached slide. The King of the Mountain can be used as a standalone feature or connected to other Aquaglide Aquapark features on three sides using the D-Ring Interloc system.



Includes:

- King of the Mountain
- 5 Vario Lock straps
- Climbing rope
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, sliding, and jumping.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

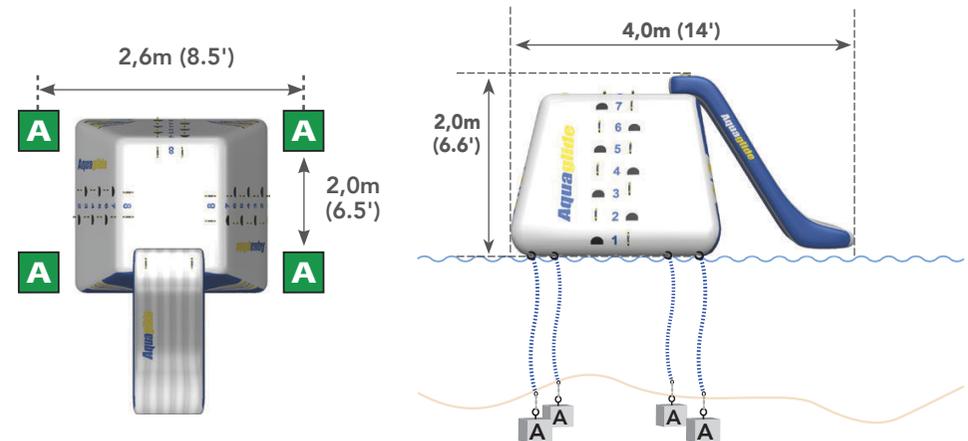

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT*	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	STRAPS	BRIDLE	WORKING PRESSURE
4 4	363 kg (800 lbs.)	2,44m (8ft)	4,5m (15ft)	4000 kg (8800 lbs.)	1000 kg (2200 lbs.) or equivalent holding	4	4	4	5 5 5	5 Vario-Lock	Climbing Rope	MAIN [1] 1,0psi (0,069 bar), SLIDE [2] 2,0psi (0,138 bar)

THUNDERDOME

Aquaglide

Aquapark / Signature Series

US MAP: \$6,499.99

Item Number: 585220111

SKU: 0790628043366

Dimensions: L 14.7' x W 14.7' x H 7.5'
(L 4,5m x W 4,5m x H 2,3m)

Box Dimensions:

L 44" x W 28" x H 19", 216 lbs, 1pc.
(L 110cm x W 70cm x H 48cm, 98 kg)



The Thunderdome is a massive, versatile arena structure that can quickly become the centerpiece of any Aquaglide Aquapark. With 32 climbing handles, the Thunderdome can be used as an arena as well as a climbing mountain, and features eight radiused slides, nine mesh crow's nest seats, and an interior lower splash zone. The Thunderdome can be used as a standalone feature or connected to other Aquaglide Aquapark features on all eight sides using the D-Ring Interloc system.

Includes:

- Thunderdome
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, sliding, jumping, and resting.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

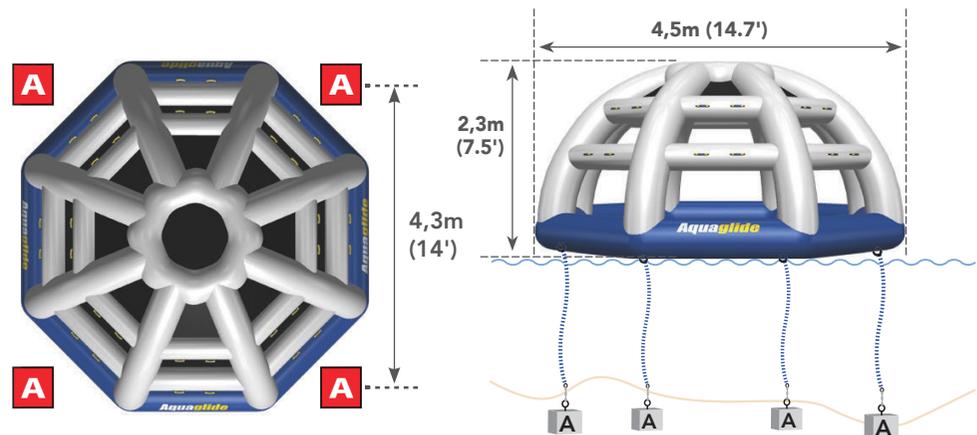

USERS ADULT / CHILD 12 12	MAX WEIGHT CAPACITY KG LBS. 1089 kg (2400 lbs.)	MINIMUM WATER DEPTH 2,44m (8ft)	MIN. DISTANCE AWAY M FT 4,5m (15ft)	MIN. TOTAL ANCHOR WEIGHT * 4000 kg (8800 lbs.)	ANCHOR WEIGHT 1000 kg (2200 lbs.) or equivalent holding	NUMBER OF ANCHOR WEIGHTS 4	ANCHOR RINGS 4	VERTICAL MOORING LINES 4	D-RINGS 5 5 5 5 5 5 5 5	WORKING PRESSURE LOWER [1] 2.0 psi (0,138 bar) UPPER [2] 2.5 psi (0,172 bar)
--	--	--	--	---	---	---	-----------------------------	---------------------------------------	---	---

KAOS

US MAP: \$5,499.99

Item Number: 585219660

SKU: 0790628042185

Dimensions: L 25' x W 25' x H 4'
(L 7,6m x W 7,6m x H 1,2m)

Box Dimensions:

L 45" x W 30" x H 20", 330 lbs. 1pc.
(L 115cm x W 75cm x H 50cm, 150 kg)

With its unique inflatable dome, the Kaos provides a flexible space for users of all ages to climb, bounce, slide, splash, or lounge, and makes a great alternative to a conventional trampoline. Use the Kaos as a standalone feature, or connect it to other Aquaglide Aquapark features on all eight sides using the D-Ring Interloc system.



Aquaglide

Signature Aquapark Feature

Includes:

- Kaos
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Bouncing, climbing, splashing, and lounging.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam w/ tubular-welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

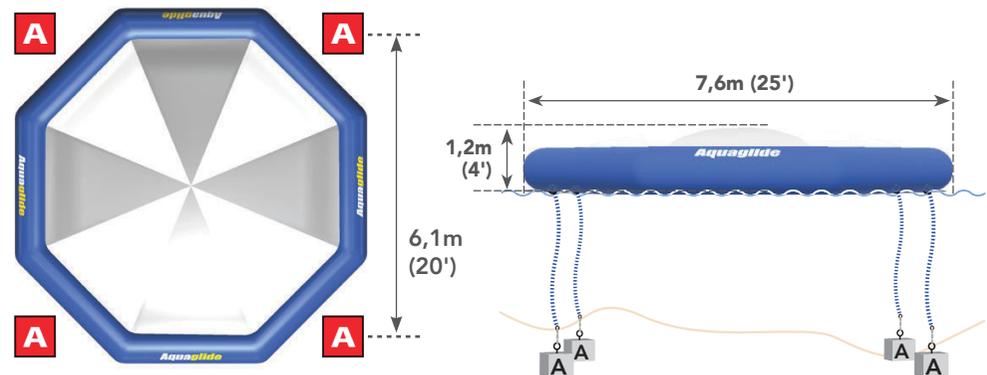

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE MAIN [1] 0.8 psi (0,055 bar) [2] 0.3 psi (0,002 bar)
5 5	454 kg (1000 lbs.)	2,26m (7.4ft)	4,5m (15ft)	8000 kg (17,600 lbs.)	2000 kg (4400 lbs.) or equivalent holding	4	4	4	5 5 5 5	

ARENA 30

Aquaglide

Signature Aquapark Feature

US MAP: \$13,999.99

Item Number: 585219667

SKU: 0790628042253

Dimensions: L 30' x W 15' x H 8.3'
(L 9,2m x W 4,6m x H 2,5m)

Box Dimensions:

Frame: L 43" x W 31.5" x H 22" 176 lbs.

(L 110cm x W 80cm x H 55cm, 80 kg)

Platform: 43" x 31.5" x H 22", 513 lbs.

(L 110 x W 80cm x 30cm, 233 kg)



Release your inner athlete and make your own game on the spot. Available in two sizes, the Arena 40 and the Arena 30, the Aquaglide Arena is an extremely versatile platform for virtually unlimited fun. These floating, all-purpose sports courts allow users to challenge friends to football, volleyball, dodgeball, rugby, or even a badminton game. The Arena's spacious platforms are perfect for yoga or other group workouts. Connect to any aquapark using our D-Ring Interloc system.

Includes:

- Arena 30
- 14 Vario Lock straps
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Playing football, volleyball, dodge-ball, rugby, and badminton.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam w/ tubular - welded 3 layer

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

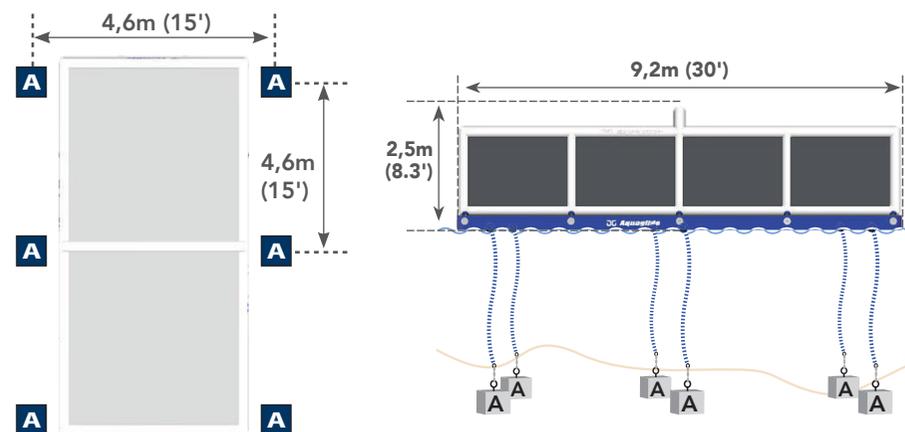

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
10 12	726 kg (1600 lbs.)	1,21m (4ft)	3,0m (10ft)	18,000 kg (39,600 lbs.)	3000 kg (6600 lbs.) or equivalent holding	6	6	6	5 5	MAIN [1] platform 1.5 psi (0,103 bar), Frame [2] 2.2 psi (0,152 bar)

MONKEY DOME

Aquaglide

Track Features

US MAP: \$6,999.99

Item Number: 585219662

SKU: 0790628042208

Dimensions: L 20' x W 10' x H 10.9'
(L 6,1m x W 3,1m x H 3,3m)

Box Dimensions:

L 47.2" x W 39.4" x H 27.6", 348 lbs. 1 pc.
(L 120cm x W 100cm x H 70cm, 157,8 kg)



The Monkey Dome is a fun feature that challenges users to swing or climb their way across without falling. However, unlike monkey bars on land, the Monkey Dome is much more forgiving because when a user falls, they land in the water. The Monkey Dome's sides also provide a way to transfer to other Aquapark features by providing two Neptune-style structures where users hold on and balance from beam to beam as they traverse the structure. With three options to cross, the Monkey Dome can be used as a standalone feature or connected to other Aquaglide Aquapark features using the D-Ring Interloc system.

Includes:

- Monkey Dome
- 10 Vario Lock straps
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, swinging, and traversing.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam w/ tubular-welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

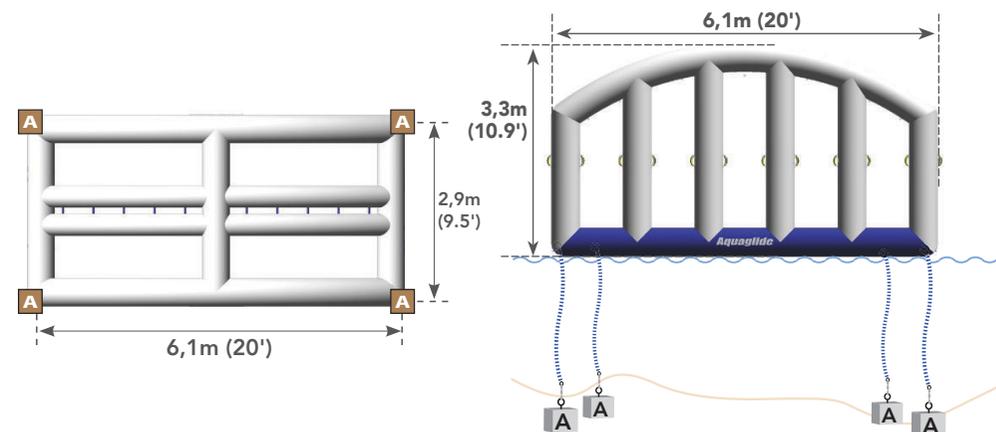

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	STRAPS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 6	726 kg (1600 lbs.)	2,58m (8.5ft)	4,5m (15ft)	4000 kg (8800 lbs.)	1000 kg (2200 lbs.) or equivalent holding	4	4	10 Vario-Lock Cinch Straps	4	5 5 4 4	MAIN [1] 1.7 psi (0,117 bar) TUBE [2] 1.7 psi (0,117 bar) PLATFORM [3] 5.0 psi (0,345 bar)

NEPTUNE

US MAP: \$2,999.99

Item Number: 585219663

SKU: 0790628042215

Dimensions: L 20' x W 8.2' x H 9.8'
(L 6,1m x W 2,5m x H 3m)

Box Dimensions:

L 39.3" x W 28.3" x H 17.3", 154 lbs. 1 pc.
(L 100cm x W 72cm x H 44cm, 70kg)



The Neptune is named after the god of water and pushes users to traverse to the feature as fast as they can. Users race themselves or other opponents to see who's fastest by using their arms to hold and balance from beam to beam. The Neptune works as a standalone feature or with any Aquaglide Aquapark configuration connected using the D-Ring Interloc system.

Includes:

- Neptune
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Tornado 110v 2.5 Pump
- Turbo 2.3 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Balancing and traversing.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam w/ tubular - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

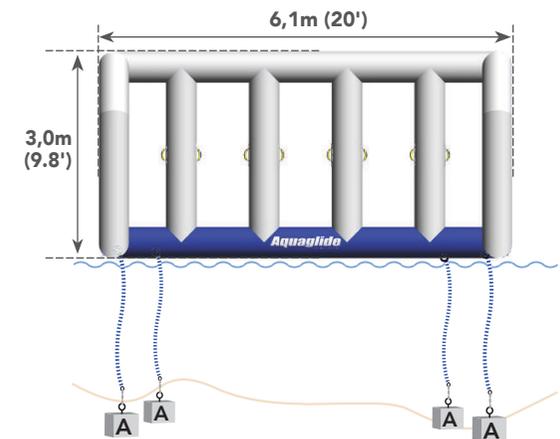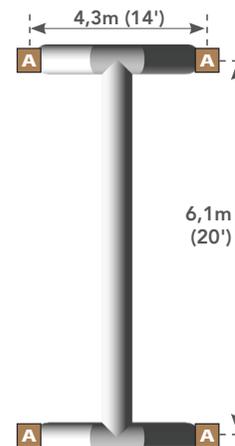

USERS ADULT / CHILD 4 4	MAX WEIGHT CAPACITY KG LBS. 363 kg (800 lbs.)	MINIMUM WATER DEPTH 2,41m (7.9ft)	MIN. DISTANCE AWAY M FT 3m (10ft)	MIN. TOTAL ANCHOR WEIGHT * 4000 kg (8800 lbs.)	ANCHOR WEIGHT 1000 kg (2200 lbs.) or equivalent holding	NUMBER OF ANCHOR WEIGHTS 4	ANCHOR RINGS 4	VERTICAL MOORING LINES 4	D-RINGS 5 5	WORKING PRESSURE MAIN [1] 1.2 psi (0,083 bar) [2] 1.2 psi (0,083 bar)
--	--	--	--	---	---	---	-----------------------------	---------------------------------------	-------------------------	---

I-HOP

US MAP: \$3,299.99

Item Number: 585220101

SKU: 0790628042772

Dimensions: L 20' x W 10' x H 3.25'
(L 6,1m x W 3,1m x H 1,0m)

Box Dimensions:

L 30" x W 22" x H 14", 1 pc.
(L 75cm x W 55cm x H 35cm)

Created to challenge users to hop, jump, or crawl across, the I-Hop is a balance testing feature that challenges even the most skilled park visitors. Featuring non-slip surfaces on all jump surfaces, the I-Hop creates an American Ninja Warrior-like structure that's a popular feature with a broad spectrum of users. Connect the I-Hop to any Aquaglide Aquapark configuration on two sides using the integrated D-Ring Interloc system.



Includes:

- I-Hop
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Balancing, jumping, and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

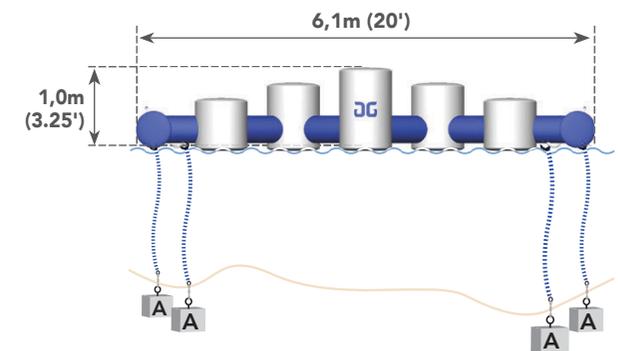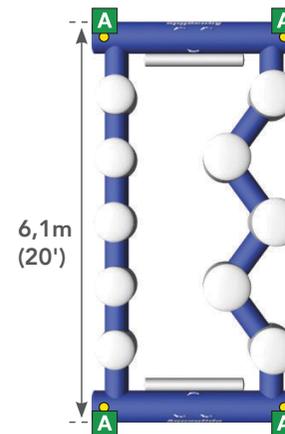

USERS
ADULT / CHILD

4 | 4

MAX WEIGHT
CAPACITY KG | LBS.

454 kg
(1000 lbs.)

MINIMUM
WATER DEPTH

1,41m
(4.6ft)

MIN. DISTANCE
AWAY M | FT

3,0m
(10ft)

MIN. TOTAL
ANCHOR WEIGHT *

2000 kg
(4400 lbs.)

ANCHOR
WEIGHT

500 kg
(1100 lbs.)
or equivalent holding

NUMBER OF
ANCHOR WEIGHTS

4

ANCHOR
RINGS

4

VERTICAL
MOORING LINES

4

D-RINGS

5 | 5

WORKING
PRESSURE

MAIN [1] 1.2 psi
(0,083 bar),
BOARDING TUBES [2]
2.0 psi (0,138 bar)

BLOCKADE 20

Aquaglide

Track Features

US MAP: \$3,499.99

Item Number: 585219101

SKU: 0790628041164

Dimensions: L 20' x W 6.5' x H 5'
(L 6,1m x W 2m x H 1,5m)

Box Dimensions:

L 40" x W 32" x H 22", 74 lbs. 1 pc.
(L 100cm x W 80cm x H 55cm, 33,4 kg)



The Blockade 20 is an on-the-water obstacle course designed to test agility by challenging users to run, dip, duck, and dive their way across. Users can challenge others to a race across this 20-foot feature to see who's fastest to the other side. Connect the Blockade 20 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system.

Includes:

- Blockade 20
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Running, balancing, and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

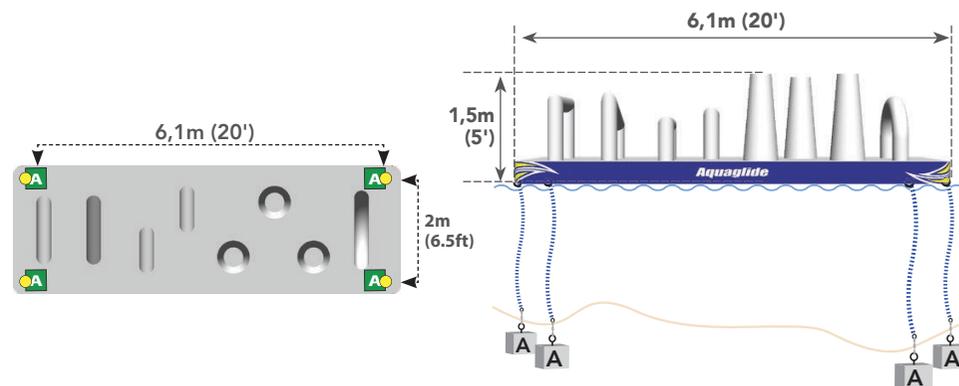

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
5 5	454 kg (1000 lbs.)	1,67m (5.5ft)	3m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	5 5 5 5	10 Vario-Lock	MAIN [1] 1.3 psi (0,089 bar)

LUGEWAY 20

Aquaglide

Track Features

US MAP: \$3,299.99

Item Number: 585221105

SKU: 0790628044370

Dimensions: L 20' x W 5.2' x H 3.4'
(L 6,1m x W 1,6m x H 1,1m)

Box Dimensions:

L 113 x W 83 x H 52cm, 93kg



This 20-foot straightaway challenges users and adds diversity to any aquapark layout. Built for speed, the Lugeway 20 challenges users to attempt to slide all the way across or works as a transition walkway to other features. The Lugeway 20 connects at both ends using Vario straps and fits any Aquaglide Aquapark Series configuration. The Lugeway is available to two sizes, the Lugeway 10 and the Lugeway 20

Includes:

- Lugeway 20
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

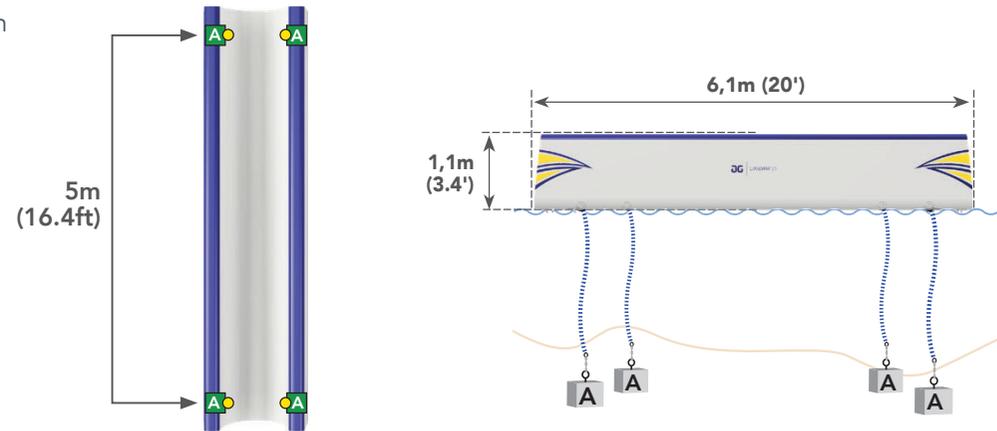

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
2 2	181 kg (400 lbs.)	1,43m (4.7ft)	3,0m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	4	5 5	Main [1] 1.5psi (0,103bar)

PARKWAY 20

Aquaglide

Track Features

US MAP: \$2,899.99

Item Number: 585219105

SKU: 0790628041201

Dimensions: L 20' x W 6.5' x H 3.5'
(L 6,1m x W 2m x H 1,1m)

Box Dimensions:

L 2.5' x W 1.8' x H 1.3', 150 lbs.
(L 75cm x W 55cm x H 40cm, 68 kg)



The Parkway 20 provides a fun and challenging undulating surface for users to attempt to run, walk, or slide across on their stomachs. Like a bicycle pump track design, the Parkway 20 makes transferring to other aquapark features an exciting and slippery challenge. Connect the Parkway 20 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system. The Parkway is available in three sizes, the Parkway 30, the Parkway 20, and the Parkway 10.

Includes:

- Parkway 20
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

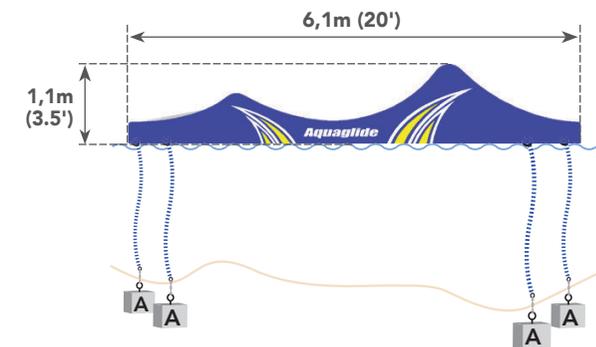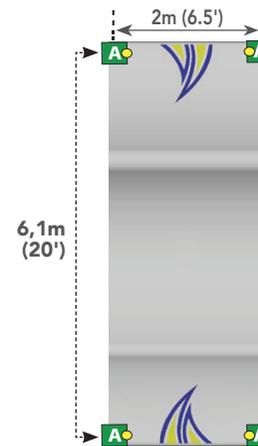

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
6 6	540 kg (1190 lbs.)	1,44m (4.7ft)	3m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	5 5 5 5	10 Vario-Lock	MAIN [1] 1.3 psi (0,089 bar)

FOXTROT

US MAP: \$1,499.99

Item Number: 585219668

SKU: 0790628042277

Dimensions: L 20' x W 6.5' x H 1.5'
(L 6,1m x W 2m x H 0,5m)

Box Dimensions:

L 30" x W 22" x H 14", 57 lbs. 1pc.
(L 76cm x W 56cm x H 36cm, 26 kg)



Designed as an approachable feature open to all skill levels, the I-Beam tests balance, strength, and concentration. Whether users race to the other side, hold jousting matches or see who can stay on the longest, the I-Beam offers the fun of a balance beam in a more forgiving setting. Connect the I-Beam to any Aquaglide Aquapark configuration on two sides using the integrated D-Ring Interloc system.

Includes:

- Foxtrot
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Balancing.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

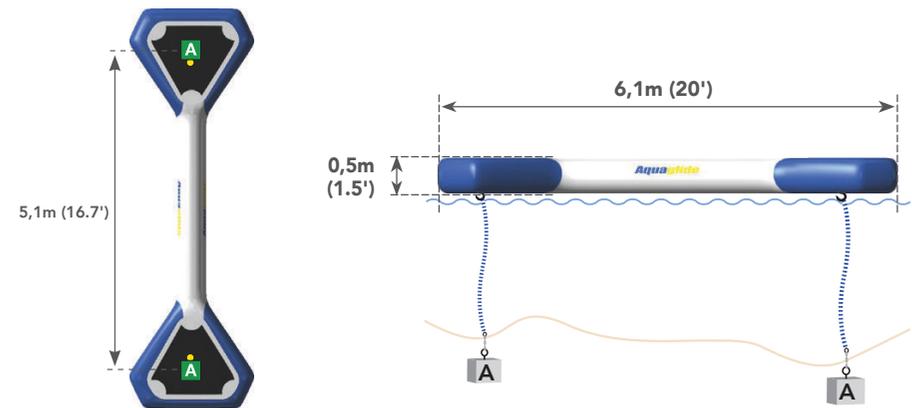

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
4 4	363 kg (800 lbs.)	1,21m (4ft)	3m (10ft)	1000 kg (2200 lbs.)	500 kg (1100 lbs.) or equivalent holding	2	2	5 5	MAIN [1] 1.2 psi (0,083 bar)

WALK ON WATER

Aquaglide

Track Features

US MAP: \$2,199.99

Item Number: 585219679

SKU: 0790628042369

Dimensions: L 20' x W 5' x H 0.3'
(L 6m x W 1,5m x H 0,1m)

Box Dimensions:

L 65" x W 15.7" x H 12.6", 104 lbs.
(L 165cm x W 40cm x H 32cm, 47 kg)



The Walk on Water is designed for higher traffic Aquaparks and those installed in extreme climates or closer to the Equator. Featuring our class-leading 10 cm Double-layer drop-stitch construction, the Walk on Water is an exciting alternative to the Speedway 20. It is a fun and challenging way to connect Aquapark features. Use as a standalone item or connect to any Aquaglide Aquapark using the integrated D-ring Interloc System.

Includes:

- Walk on Water
- 10 Vario Lock straps
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

A challenging transfer to other features.

Warranty:

3-year limited against any manufacturing defects.

Material:

10cm welded dropstitch


Construction:

Welded dropstitch

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

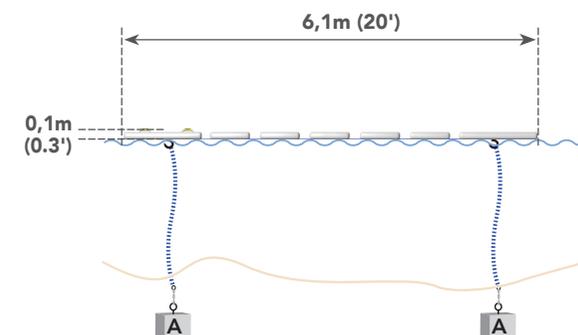

USERS ADULT / CHILD
8 8

MAX WEIGHT CAPACITY KG LBS.
726 kg (1600 lbs.)

MINIMUM WATER DEPTH
1,21m (4ft)

MIN. DISTANCE AWAY M FT
3m (10ft)

NUMBER OF ANCHOR WEIGHTS
2

MIN. TOTAL ANCHOR WEIGHT *
500 kg (1100 lbs.)

ANCHOR WEIGHT
250 kg (550 lbs.) or equivalent holding

STRAPS
10 Vario-Lock

ANCHOR RINGS
2

D-RINGS
5 5

WORKING PRESSURE
MAIN [1-7] 10 psi (0,689 bar)

VISTA 10

US MAP: \$2,999.99

Item Number: 585220108

SKU: 0790628043342

Dimensions: L 10' x W 6.5' x H 5'
(L 3m x W 2m x H 1,5m)

Box Dimensions:

L 34" x W 30" x H 14", 108 lbs. 1pc.
(L 87cm x W 75cm x H 36cm, 49 kg)



The Vista 10 provides countless ways to traverse this challenging structure: climb over the high roads or explore the inner passages, or for those who choose to linger, an interior splash zone with mesh floors provides a cool place for up to four users to rest, relax, or play. The Vista 10 connects to other Aquaglide Aquapark features using the secure D-Ring Interloc system.

Includes:

- Vista 10
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

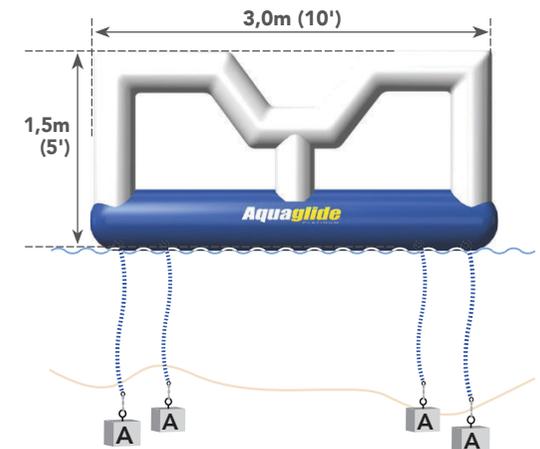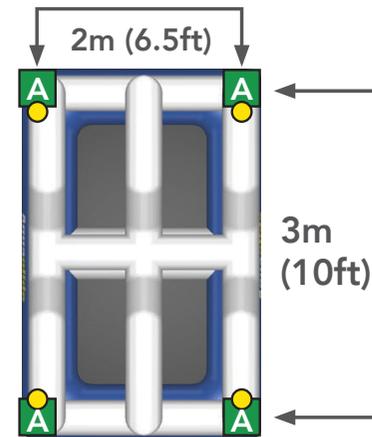

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	WORKING PRESSURE
4 4	454 kg (1000 lbs.)	1,64m (5.3ft)	3m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	5 5 5 5	LOWER [1] 2.0 psi (0,138 bar) UPPER [2] 2.0 psi (0,138 bar)

SUBWAY 10

Aquaglide

Track Features

US MAP: \$2,899.99

Item Number: 585219103

SKU: 0790628041188

Dimensions: L 10' x W 8' x H 5'
(L 3m x W 2,5m x H 1,5m)

Box Dimensions:
L 36" x W 23" x H 17", 169 lbs. 1pc.
(L 90cm x W 57cm x H 42cm, 76,3 kg)



The Subway 10 features multiple paths when transferring to other Aquapark features, including an arched climbing wall above a covered tunnel. Designed to integrate into any Aquaglide Aquapark Series using the secure D-Ring Interloc system, the Subway 10 is quite possibly the most fun users will ever have on the Subway.

Includes:

- Subway 10
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

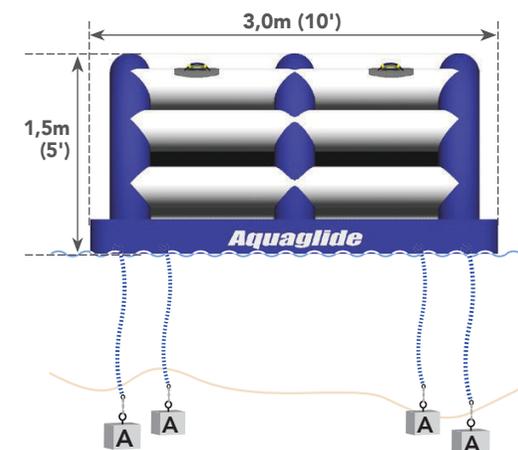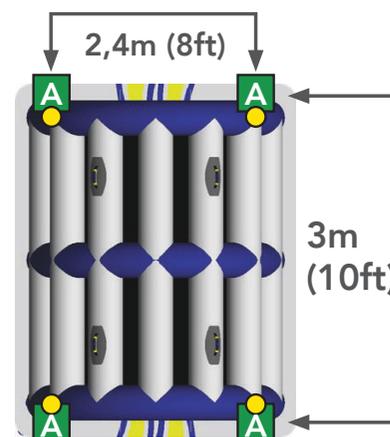

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
4 4	454 kg (1000 lbs.)	1,67m (5.5ft)	3m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	5 5 5 5	10 Vario-Lock	MAIN [1] 2.0 psi (0,137 bar) TUBE [2] 3.0 psi (0,206 bar)

LUGEWAY 10

Aquaglide

Track Features

US MAP: \$2,199.99

Item Number: 585221104

SKU: 0790628044363

Dimensions: L 10' x W 5.2' x H 3.4'
(L 3,0m x W 1,6m x H 1,1m)

Box Dimensions:

L 90cm x W 70cm x H 30cm, 49kg

A ten-foot luge straightaway built for speed, the Lugeway 10 works as a walkway—but ambitious users strive to slide all the way across. Connects at both ends using Vario straps and fits any Aquaglide Aquapark Series configuration. The Lugeway is available to two sizes, the Lugeway 10 and the Lugeway 20.



Includes:

- Lugeway 10
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

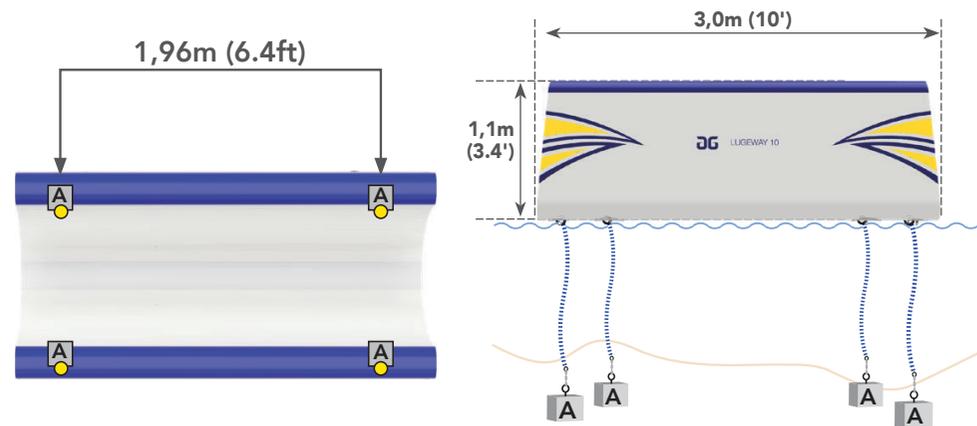

USERS ADULT / CHILD 1 1	MAX WEIGHT CAPACITY KG LBS. 181 kg (400 lbs.)	MINIMUM WATER DEPTH 1,43m (4.7ft)	MIN. DISTANCE AWAY M FT 3,0m (10ft)	MIN. TOTAL ANCHOR WEIGHT * 1000 kg (2200 lbs.)	ANCHOR WEIGHT 250 kg (550 lbs.) or equivalent holding	NUMBER OF ANCHOR WEIGHTS 4	ANCHOR RINGS 4	VERTICAL MOORING LINES 4	D-RINGS 5 5	WORKING PRESSURE Main [1] 1.5psi (0,103bar)
--	--	--	--	---	---	---	-----------------------------	---------------------------------------	-------------------------	--

SIERRA 10

Aquaglide

Track Features

US MAP: \$1,999.99

Item Number: 585220107

SKU: 0790628043335

Dimensions: L 10' x W 8' x H 3.5'
(L 3m x W 2,4m x H 1,1m)

Box Dimensions:

L 34" x W 30" x H 10", 84 lbs. 1pc.
(L 86cm x W 76cm x H 25cm, 38 kg)



The Sierra 10 feature presents an exciting challenge that allows users to climb, balance, slide, or jump from the exterior structure, or play and rest on the two interior mesh floor splash zones. For those who choose to hang out in the interior splash zones, mesh floors provide a cool place for up to four users to rest, relax, or play. Connect the Sierra 10 to other Aquaglide Aquapark features using the integrated secure D-Ring Interloc system.

Includes:

- Sierra 10
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, balancing, jumping, sliding, and resting.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

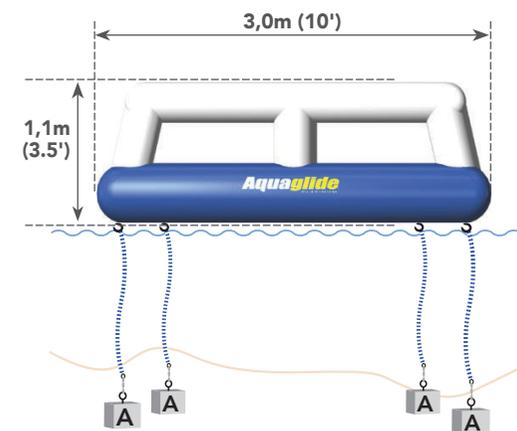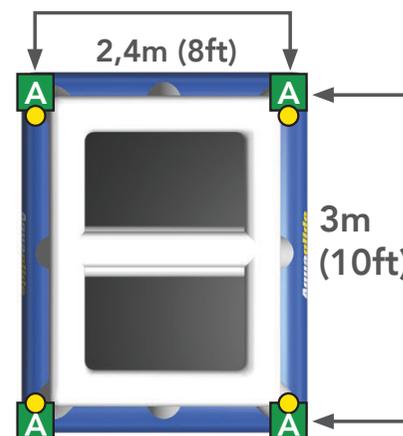

USERS
ADULT / CHILD

4 | 4

MAX WEIGHT
CAPACITY KG | LBS.

454 kg
(1000 lbs.)

MINIMUM
WATER DEPTH

1,46m
(4ft)

MIN. DISTANCE
AWAY M | FT

3m
(10ft)

MIN. TOTAL
ANCHOR WEIGHT *

2000 kg
(4400 lbs.)

ANCHOR
WEIGHT

500 kg
(1100 lbs.)
or equivalent holding

NUMBER OF
ANCHOR WEIGHTS

4

ANCHOR RINGS

4

D-RINGS

5 | 5
5 | 5

WORKING
PRESSURE

LOWER [1] 2.0 psi
(0,138 bar)
UPPER [2] 2.0 psi
(0,138 bar)

BARRICADE 10

US MAP: \$1,999.99

Item Number: 585219102

SKU: 0790628041171

Dimensions: L 10' x W 6.5' x H 5'
(L 3m x W 2m x H 1,5m)

Box Dimensions:

L 30" x W 22" x H 16", 105 lbs. 1 pc.
(L 75cm x W 55cm x H 40cm, 47,6 kg)



The Barricade 10 has a smaller footprint than its larger sibling, Blockade 20, yet still packs plenty of challenges and fun into an on-the-water obstacle course designed to test agility. Users can challenge one another to run, dip, duck, and dive their way across to see who's fastest to the other side. Connect the Barricade 10 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system.

Includes:

- Barricade 10
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Running, balancing, and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

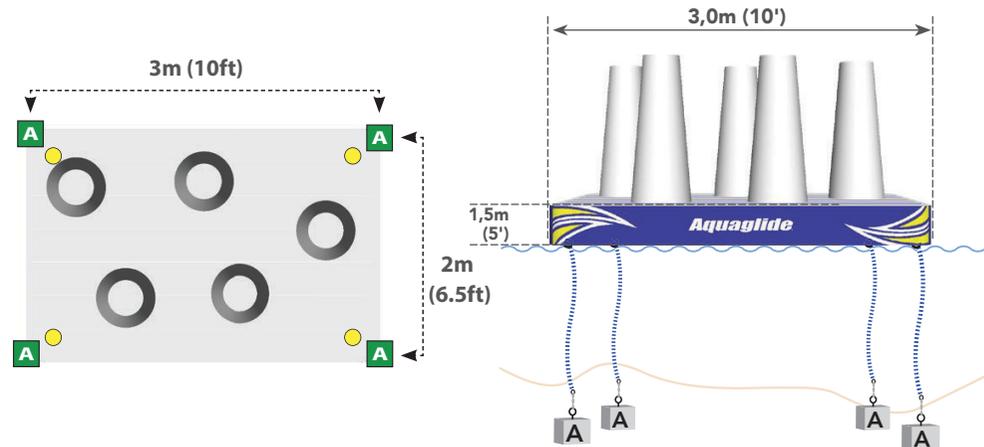

USERS ADULT / CHILD 4 4	MAX WEIGHT CAPACITY KG LBS. 454 kg (1000 lbs.)	MINIMUM WATER DEPTH 1,67m (5.5ft)	MIN. DISTANCE AWAY M FT 3m (10ft)	MIN. TOTAL ANCHOR WEIGHT * 2000 kg (4400 lbs.)	ANCHOR WEIGHT 500 kg (1100 lbs.) or equivalent holding	NUMBER OF ANCHOR WEIGHTS 4	ANCHOR RINGS 4	D-RINGS 5 5 5 5	STRAPS 10 Vario-Lock	WORKING PRESSURE MAIN [1] 1.3 psi (0,089 bar)
--	---	--	--	---	--	---	--------------------------	-----------------------------------	------------------------------------	--

OVERPASS 10

Aquaglide

Track Features

US MAP: \$1,799.99

Item Number: 585219106

SKU: 0790628041218

Dimensions: L10' x W 6' x H 5.8'
(L 3m x W 1,8m x H 1,7m)

Box Dimensions:

L 30" x W 22" x H 14", 75 lbs. 1 pc.
(L 75cm x W 55cm x H 35cm, 33,4 kg)



Ideal for challenge tracks in a pool or open water, the Overpass 10 offers a fun climbing challenge with an optional balancing route for less daring users. The Overpass 10's arched climbing wall challenges users to take the high route across and includes integrated mesh crow's nest seats for a comfortable place to rest en route. The Overpass 10 integrates into any Aquaglide Aquapark Series using the secure D-Ring Interloc system.

Includes:

- Overpass 10
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, balancing, and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

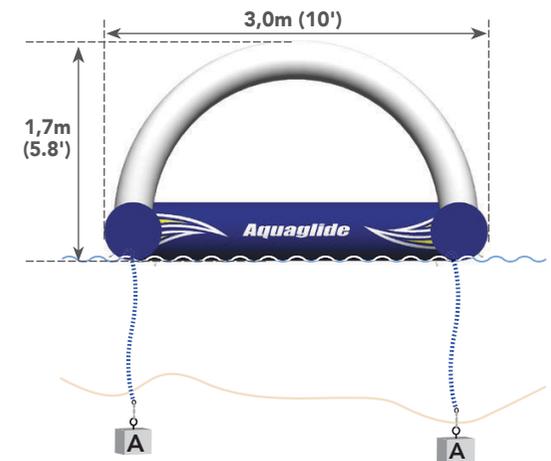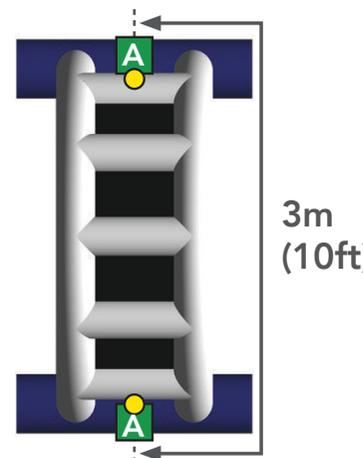

USERS ADULT / CHILD 2 2	MAX WEIGHT CAPACITY KG LBS. 226 kg (500 lbs.)	MINIMUM WATER DEPTH 1,80m (5.9ft)	MIN. DISTANCE AWAY M FT 3m (10ft)	MIN. TOTAL ANCHOR WEIGHT * 1000 kg (2200 lbs.)	ANCHOR WEIGHT 500 kg (1100 lbs.) <small>or equivalent holding</small>	NUMBER OF ANCHOR WEIGHTS 2	ANCHOR RINGS 2	D-RINGS 5 5	STRAPS 10 Vario-Lock	WORKING PRESSURE MAIN [1] 2.0 psi (0,137 bar) TUBE [2] 2.6 psi (0,179 bar)
--	--	--	--	---	---	---	--------------------------	-------------------------	------------------------------------	---

PARKWAY 10

Aquaglide

Track Features

US MAP: \$1,599.99

Item Number: 585219104

SKU: 0790628041195

Dimensions: L 10' x W 6.5' x H 2.4'
(L 3m x W 2m x H 0,7m)

Box Dimensions:

L 30" x W 22" x H 12", 81 lbs. 1 pc.
(L 75cm x W 55cm x H 30cm, 36,5 kg)



The Parkway 10 provides a fun and challenging surface for users to run, walk or slide across on their stomachs. Modeled after a bicycle pump track, the Parkway 10 makes transferring to other aquapark features an exciting and slippery challenge. Connect the Parkway 10 to any Aquaglide Aquapark configuration on all four sides using the integrated D-Ring Interloc system. The Parkway is available in three sizes, the Parkway 30, the Parkway 20, and the Parkway 10.

Includes:

- Parkway 10
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Boarding platform
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Sliding and transferring to other features.

Warranty:

Limited 3-year Warranty

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

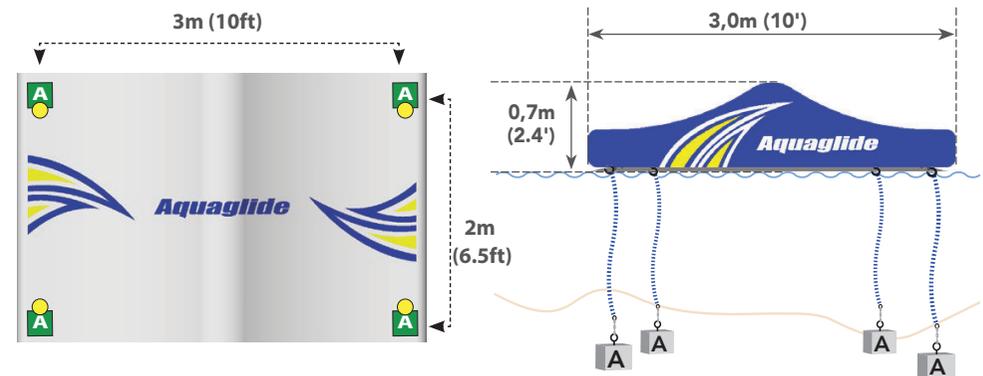

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	D-RINGS	STRAPS	WORKING PRESSURE
2 2	226 kg (500 lbs.)	1,27m (4.2ft)	3m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	5 5 5 5	10 Vario-Lock	MAIN [1] 1.8 psi (0,124 bar)

UNIVERSAL LIFEGUARD STATION

Aquaglide

Junction

US MAP: \$3,999.99

Item Number: 585219113

SKU: 0790628041690

Dimensions: L 12.5' x W 12.5' x H 14.9'
(L 3,85m x W 3,85m x H 4,5m)

Box Dimensions:

L 110cm x W 80cm x H 55cm, 123kg

The Universal Lifeguard Station features an elevated platform that provides lifeguards a 360 degree view, a fully covered top for a reprieve from the sun, and under platform storage for essential lifeguard supplies. The Universal Lifeguard Station helps lifeguards keep an eye on aquapark users from a designated perch. Connects to any Aquaglide Aquapark Series configuration using the integrated D-ring Interloc System and secure Vario-Lock cinch straps.



Includes:

- Universal Lifeguard Station
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Lifeguards.

Warranty:

3-year limited against any manufacturing defects.

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

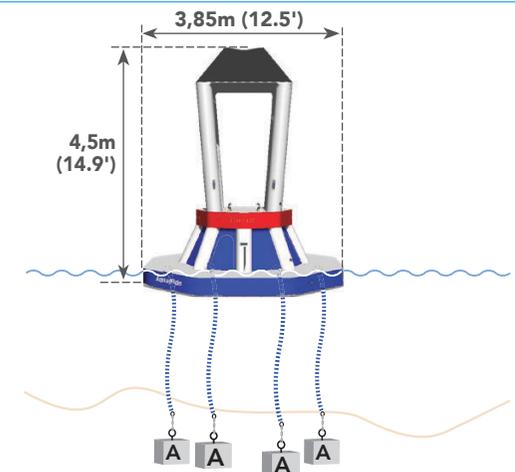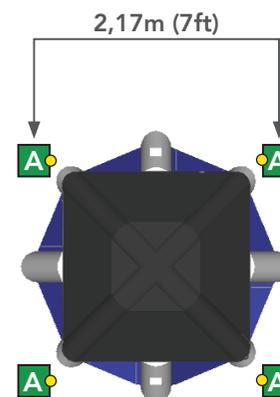

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 6	454 kg (1000 lbs.)	3,19m (10.5ft)	3m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	4	5 5 5 5 5 5 5 5	MAIN [1] 2.0 psi (0,138 bar), LOWER [2] 2.0 psi (0,138 bar), UPPER [3] 2.2psi (0,152bar)

UNIVERSAL THUNDERDOME

Aquaglide

Junction

US MAP: \$3,499.99

Item Number: 585220109

SKU: 0790628043359

Dimensions: L 12.5' x W 12.5' x H 4.9'
(L 3,8m x W 3,8m x H 1,5m)

Box Dimensions:

L 35.4" x W 27.5" x 15.7", 135 lbs. 1pc.
(L 90cm x W 70cm H 40cm, 61,3kg)

The Universal Thunderdome is an octagon-shaped structure that's a smaller version of the popular Thunderdome. Offering multiple angles and unlimited Aquapark configuration possibilities, the Universal Thunderdome can be used as a hub, a corner, or anything in between. Park layouts can be changed easily and quickly and allow your aquapark to evolve. Add new and exciting components or Speedway and Swimstep connections on all eight sides using the integrated D-ring Interloc System and secure Vario-Lock cinch straps.



Includes:

- Universal Thunderdome
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Climbing, sliding, jumping, and resting.

Warranty:

3-year limited against any manufacturing defects.

Material:

0.90 mm / 31 oz Cx3



Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

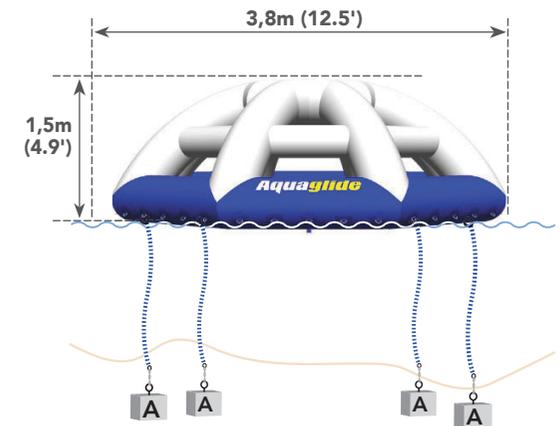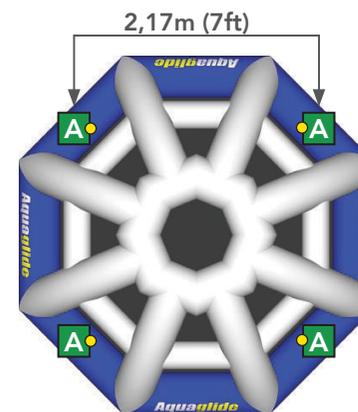

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	ANCHOR RINGS	VERTICAL MOORING LINES	D-RINGS	WORKING PRESSURE
6 6	545 kg (1200 lbs.)	1,66m (5.4ft)	3m (10ft)	2000 kg (4400 lbs.)	500 kg (1100 lbs.) or equivalent holding	4	4	4	5 5 5 5 5 5 5 5	MAIN [1] 1.8 psi (0,124 bar) [2] 1.8 psi (0,124 bar)

UNIVERSAL CONNECTION

Aquaglide

Junction

US MAP: \$2,399.99

Item Number: 585219676

SKU: 0790628042338

Dimensions: L 12.5' x W 12.5' x H 1'
(L 3,8m x W 3,8m x H 0,3m)

Box Dimensions:

L 34.25" x W 30" x H 12", 142 lbs.
(L 87cm x W 75cm x H 30cm, 64 kg)

The Universal is Aquaglide's unique connection system that allows unlimited Aquapark designs and variations. The Universal's octagon shape allows Speedway and Swimstep connections to connect to all eight sides at once, offering multiple angles and unlimited possibilities. The Universal can be used as a hub or corner and allows park owners to evolve their park layout over time. The Universal connects to any Aquaglide Aquapark Series configuration using the integrated D-ring Interloc System and secure Vario-Lock cinch straps.



Includes:

- Universal Connection
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Vario Lock straps
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Socializing and lounging.

Warranty:

3-year limited against any manufacturing defects.

Material:

0.90 mm / 31 oz Cx3


Construction:

Double I-Beam - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

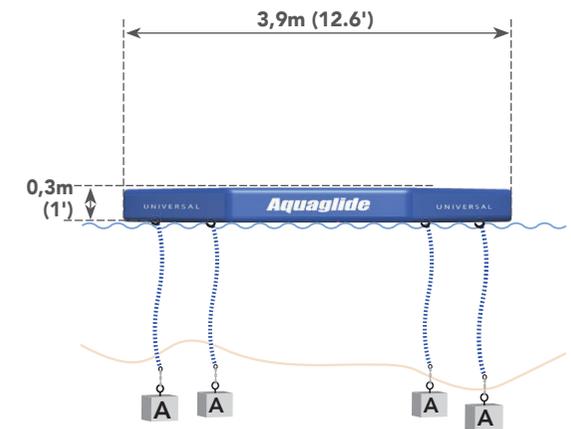

USERS
ADULT / CHILD

6 | 8

MAX WEIGHT
CAPACITY KG | LBS.

454 kg
(1000 lbs.)

MINIMUM
WATER DEPTH

1,21m
(4ft)

MIN. DISTANCE
AWAY M | FT

3m
(10ft)

MIN. TOTAL
ANCHOR WEIGHT *

2000 kg
(4400 lbs.)

ANCHOR
WEIGHT

500 kg
(1100 lbs.)
or equivalent holding

NUMBER OF
ANCHOR WEIGHTS

4

ANCHOR
RINGS

4

VERTICAL
MOORING LINES

4

D-RINGS

5 | 5 | 5 | 5
5 | 5 | 5 | 5

WORKING
PRESSURE

MAIN [1]
2.0 psi (0,138 bar)

SPEEDWAY 20

US MAP: \$1,999.99

Item Number: 585219633

SKU: 0790628041799

Dimensions: L 20' x W 5' x H 0.4'

(L 6,1m x W 1,5m x H 0,1m)

Box Dimensions:

L 30" x W 22" x H 17", 69 lbs. 1 pc.

(L 75cm x W 55cm X H 42cm, 36 kg)



The Speedway 20 is designed for higher traffic Aquaparks and those installed in extreme climates or closer to the equator. Whether a user chooses to walk, run, slip, slide, leap-frog, or cartwheel, the stable Speedway 20 is the piece that links together Aquapark features. Exceptional long-term durability offers many advantages, including ultra-low-profile boarding, for extra convenience. The Speedway is available in two sizes, the Speedway 10 and the Speedway 20.

Includes:

- Speedway 20
- 10 Vario Lock straps
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Transferring to other features.

Warranty:

3-year limited against any manufacturing defects.

Material:

10cm welded dropstitch


Construction:

Welded 2-layer DS - 4 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

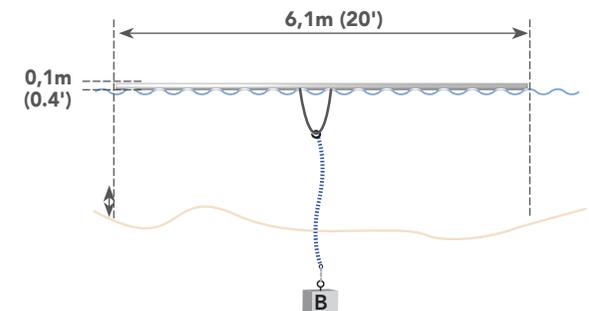

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	NUMBER OF ANCHOR WEIGHTS	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	STRAPS	D-RINGS	WORKING PRESSURE	ANCHOR RINGS
8 8	726 kg (1600 lbs.)	1,21m (4ft)	3m (10ft)	2	500 kg (1100 lbs.)	250 kg (550 lbs.) or equivalent holding	10 Vario-Lock	5 5 5 5	MAIN [1] 5.0 psi (0,345 bar)	2

SPEEDWAY 10

Aquaglide

Boarding Features

US MAP: \$1,399.99

Item Number: 585219634


SKU: 0790628041805

Dimensions: L 10' x W 5' x H 0.4' (L 3m x W 1,5m x H 0,1m)

Box Dimensions:

L 30" x W 22" x H 14", 40 lbs. 1 pc.
(L 75cm x W 55cm x H 35cm, 18 kg)

The Speedway 10 is designed for higher traffic Aquaparks and those installed in extreme climates or closer to the equator. Whether a user chooses to walk, run, slip, slide, leap-frog, or cartwheel, the stable Speedway 10 is the piece that links together Aquapark features. Exceptional long-term durability offers many advantages, including ultra-low-profile boarding, for extra convenience. The Speedway is available in two sizes, the Speedway 10 and the Speedway 20.



Includes:
Speedway 10
10 Vario Lock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Tornado 110v 2.5 Pump
Turbo 2.3 Pump

Best For:
Transferring to other features.

Warranty:
3-year limited against any manufacturing defects.

Material:
10 cm welded drop stitch

Construction:
Welded 2-layer DS -
4 layer seam

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	NUMBER OF ANCHOR WEIGHTS	STRAPS	D-RINGS	WORKING PRESSURE
5 5	454 kg (1000 lbs.)	1,21m (4ft)	3m (10ft)	N/A	10 Two-Step Vario	5 5	MAIN [1] 5.0 psi (0,345 bar)

SPLASHMAT

Aquaglide

Boarding Features

US MAP: \$1,699.99

Item Number: 585219638

SKU: 0790628031950

Dimensions: L 18' x W 5' x H 0.4'
(L 5,5m x W 1,5m x H 0,1m)

Box Dimensions:

L 30" x W 22" x H 17", 98 lbs. 1 pc.
(L 75cm x W 55cm X H 42cm, 44,5 kg)



The Splashmat was designed for higher traffic Aquaparks and Aquaparks installed in extreme climates or closer to the equator. Produced with class-leading 10 cm Double-layer drop-stitch construction, the Splashmat inspires continuous, creative free-play where users can walk, run, slip, slide, leap-frog, and cartwheel down this stable platform. Use as a standalone item or connect to any Aquaglide Aquapark using the integrated D-ring Interloc System.

Includes:

- Splashmat
- 10 Vario Lock straps
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Bridle
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

A challenging transfer to other features.

Warranty:

3-year limited against any manufacturing defects.

Material:

10 cm welded dropstitch


Construction:

Welded 2-layer DS - 4 layer seam

Mooring Diagram (Optional)

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

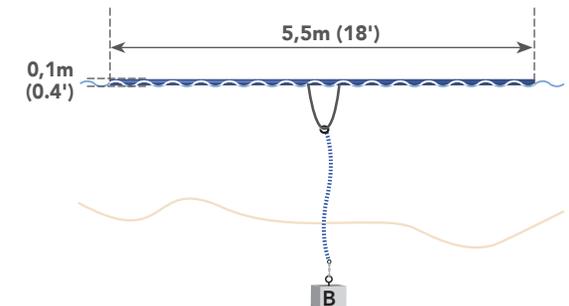

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	NUMBER OF ANCHOR WEIGHTS	MIN. TOTAL ANCHOR WEIGHT*	ANCHOR WEIGHT	STRAPS	D-RINGS	WORKING PRESSURE	ANCHOR RINGS	BRIDLE
6 8	454 kg (1000 lbs.)	1,21m (4ft)	3m (10ft)	1	500 kg (1100 lbs.)	250 kg (550 lbs.) or equivalent holding	10 Vario-Lock	5 5	MAIN [1] 5.0 psi (0,345 bar)	2	1

SWIMSTEP XL

Aquaglide

Boarding Features

US MAP: \$849.99

Item Number: 585219637

SKU: 0790628032469

Dimensions: L 5' x W 6.5' x H 0.4'
(L 1,5m x W 2m x H 0,1m)

Box Dimensions:

L 30" x W 22" x H 12", 48 lbs. 1 pc
(L 75cm x W 55cm x H 30cm, 21,5 kg)

The Swimstep 5x5 is an ergonomic platform that provides improved access over traditional boarding ladders due to its low-profile design. Produced with class-leading 10 cm Double-layer drop-stitch construction, the Swimstep 5x5 is designed for exceptional durability and connected to any Aquapark using the 5 D-Ring Interloc System.



Includes:
Swimstep XL
10 Vario Lock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Tornado 110v 2.5 Pump
Turbo 2.3 Pump

Best For:
Sliding or jumping.

Warranty:
3-year limited against any manufacturing defects.

Material:
10 cm welded drop stitch

Construction:
Welded 2-layer DS -
4 layer seam

USERS
ADULT / CHILD
2 | 3

MAX WEIGHT
CAPACITY KG | LBS.
**181 kg
(400 lbs.)**

MINIMUM
WATER DEPTH
**1,21m
(4ft)**

MIN. DISTANCE AWAY
M | FT
**3m
(10ft)**

**NO
ANCHORING
REQUIRED**

STRAPS
**10
Vario-Lock**

D-RINGS
5 | 5 | 5 | 5

WORKING
PRESSURE
**MAIN [1]
5.0psi (0,345) bar**

SWIMSTEP 5x5

Aquaglide

Boarding Features

US MAP: \$799.99

Item Number: 585219114


SKU: 0790628041683

Dimensions: L 5' x W 5' x H 0.4'
(L 1,5m x W 1,5m x H 0,1m)

Box Dimensions:

L 30" x W 22" x H 12", 48 lbs. 1 pc
(L 75cm x W 55cm x H 30cm, 21,5 kg)

The Swimstep 5x5 is an ergonomic platform that provides improved access over traditional boarding ladders due to its low-profile design. Produced with class-leading 10 cm Double-layer drop-stitch construction, the Swimstep 5x5 is designed for exceptional durability and connected to any Aquapark using the 5 D-Ring Interloc System.



Includes:
Swimstep 5x5
10 Vario Lock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Tornado 110v 2.5 Pump
Turbo 2.3 Pump

Best For:
Sliding or jumping.

Warranty:
3-year limited against any manufacturing defects.

Material:
10 cm welded drop stitch

Construction:
Welded 2-layer DS -
4 layer seam

USERS
ADULT / CHILD
1 | 1

MAX WEIGHT
CAPACITY KG | LBS.
**181 kg
(400 lbs.)**

MINIMUM
WATER DEPTH
**1,21m
(4ft)**

MIN. DISTANCE AWAY
M | FT
**3m
(10ft)**

**NO
ANCHORING
REQUIRED**

STRAPS
**10
Vario-Lock**

D-RINGS
5 | 3 | 5 | 3

WORKING
PRESSURE
MAIN [1]
5.0 psi (0,345) bar

SUPERTRAMP 23

Aquaglide

Trampolines & Bouncers

US MAP: \$4,999.99

Item Number: 585221152

SKU: 0790628045667

Dimensions: L 22.5' x W 22.5' x H 3.3'

(L 7m x W 7m x H 1m)

17.3' jump surface (5,3m)

Box Dimensions:

Box 1: Tube: L 31.5" x W 23.5" x H 16.5", 157 lbs.

(L 80cm x W 60cm x H 42cm, 71 kg)

Box 2: Spring pad + Springs: L 80" x W 17" x H 11.25", 70 lbs.

(L 203cm x W 43cm x H 29cm, 32 kg)

Box 3: Frame + Mesh + Bolts: L 82" x W 14" x H 6", 110 lbs.

(L 208cm x W 36cm x H 14,5cm, 50 kg)

Box 4: Swimstep: L 14.5" x W 7" x H 21" 20 lbs. 1 pc.

(L 37cm x W 18cm x H 53cm, 9,1 kg)



The Supertramp 23 provides an outstanding jumping, bouncing, and launching platform supported by a heavy-duty galvanized steel frame and robust springs. Use the Supertramp 23 trampoline as a standalone item, or connect to any Aquaglide Aquapark layout configuration using the integrated D-ring Interloc System. The Supertramp is not only a trampoline; it's a floating centerpiece for users to soar above the water.

Includes:

- Supertramp 23
- Swimstep
- 4-way mooring bridle
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Bouncing, jumping, launching, and lounging.

Warranty:

3-year limited against any manufacturing defects.

Material:

0.90 mm / 31oz PVC weight


Construction:

Tubular - welded 3 layer seam

Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.

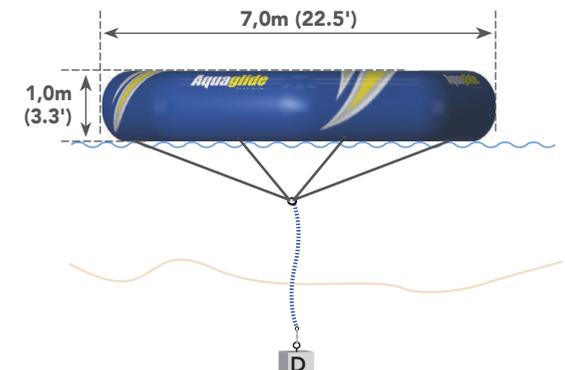

USERS ADULT / CHILD
Bouncing 3 3 Lounging 5 5

MAX WEIGHT CAPACITY KG LBS.
454 kg (1000 lbs.)

MINIMUM WATER DEPTH
2,44m (8ft)

MIN. DISTANCE AWAY M FT
4,5m (15ft)

MIN. TOTAL ANCHOR WEIGHT *
1000 kg (2200 lbs.)

ANCHOR WEIGHT
1000 kg (2200 lbs.)

NUMBER OF ANCHOR WEIGHTS
1

ANCHOR RINGS
4

4-WAY MOORING BRIDLE
1

D-RINGS
5 5 5 4+2 (log)

WORKING PRESSURE
MAIN 0.8 psi (0,055 bar)

ESCALADE SUMMIT

Aquaglide

Accessories

US MAP: \$3,499.99

Item Number: 585215113


SKU: 0790628034340

Dimensions: L 4.1' x W 5' x H 12'
(L 1,3m x W 1,4m x H 3,7m)

Box Dimensions:

L 37.4" x W 28.3" x H 17.7", 138 lbs. 1pc.
(L 95cm x W 72cm x H 45cm, 62,8 kg)

At well over 16-feet tall, the Escalade Summit climbing wall presents a Deep Water Solo climbing style adrenaline rush that is not for the faint-of-heart. Reinforced handles and oversized footsteps lead from water level to the summit while integrated guard-buoys help protect the landing zone. This commanding piece connects exclusively to the Aquaglide Summit Express.

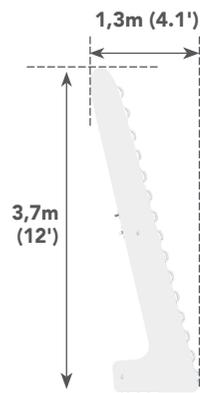

Includes:
Escalade Summit
4 Escalade Straps
5 Interlock straps
Repair kit

Not Included:
Inflation pump

Recommended Items:
Hurricane 110v 3.6 Pump
Tornado 110v 2.5 Pump
Turbo 2.3 Pump

Best For:
Climbing

Warranty:
3-year limited against any manufacturing defects.

Material:
0.80 mm / 28 oz Cx3

Construction:
Double I-Beam - welded 3 layer seam

USERS
ADULT / CHILD

1 | 1

MAX WEIGHT
CAPACITY KG | LBS.

114 kg
(250 lbs.)

MINIMUM
WATER DEPTH

2,74m
(9ft)

MIN. DISTANCE AWAY
M | FT

4,5m
(15ft)

NO
ANCHORING
REQUIRED

ATTACHES TO
SUMMIT WITH
5 D-RINGS ON
BACK AND 2
D-RINGS ON
SIDES

STRAPS

ESCALADE: 4
INTERLOCK: 5

ANCHOR
RINGS

4

D-RINGS

BOTTOM: 5
SIDE: 2

WORKING
PRESSURE

MAIN [1]
1.0psi (0,069) bar

BLAST BAG

Aquaglide

Accessories

US MAP: \$699.99

Item Number: 585209207

SKU: 0790628031080

Dimensions: L 12' x W 5.4' x H 3'
(L 3,7m x W 1,7m x H 1m)

Box Dimensions:

L 18.5" x W 15.5" x H 12.5", 44 lbs. 1 pc.
(L 58cm x W 42cm x H 30cm, 15,5 kg)



The Blast Bag uses the powerful force of air to blast friends, relatives, and guests skyward, then down for a splash landing. An integrated wedge helps focus the blast force for massive thrills and adds stability for boarding. The Blast Bag attaches to all Aquaglide Rebound models and Jungle Series play stations using our Vario-Lock cinch strap system.

Includes:

- Blast Bag
- Repair kit

Not Included:

- Anchor weights
- Mooring lines
- Bridle
- Inflation pump

Recommended Items:

- Hurricane 110v 3.6 Pump
- Complete Mooring Line, 19 ft (5,79m)

Best For:

Launching.

Warranty:

3-year limited against any manufacturing defects.

Material:

0.60 mm / 28oz PVC weight

Construction:

Double I-Beam Wedge - welded 3 layer seam


Mooring Diagram

*Weight recommendations are for anchoring in conditions that can have extreme weather, waves, etc. The weights recommended for anchoring in locations with calmer conditions such as lakes is approximately 30% less.

The information contained within this document are recommendations ONLY. Actual weight used needs to be decided by an operator and/or owner based on particular conditions.



B

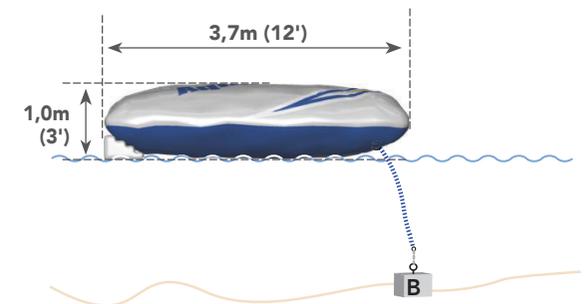

USERS ADULT / CHILD	MAX WEIGHT CAPACITY KG LBS.	MINIMUM WATER DEPTH	MIN. DISTANCE AWAY M FT	MIN. TOTAL ANCHOR WEIGHT *	ANCHOR WEIGHT	NUMBER OF ANCHOR WEIGHTS	STRAPS	VERTICAL MOORING LINES	2-WAY BRIDLE	D-RINGS	WORKING PRESSURE
2 2	181 kg (400 lbs.)	2,44m (8ft)	12m (40ft)	100 kg (220 lbs.)	100 kg (220 lbs.) or equivalent holding	1 OPTIONAL	5	1	1 OPTIONAL (4ft length)	5	WEDGE [1] 1.0 psi (0,069 bar) MAIN [2] 0.2 psi (0,014 bar)

MOORING

We offer two mooring kit options - the Vertical Mooring Line and the Complete Mooring Line. Both of these products include the necessary snap hook, buoy, quick link, and braided bungie necessary to set up a mooring line. The Adjustable Complete Mooring Line Kit also comes with segmented rope sections up to 19 feet.

The Vertical Mooring is a mooring line set for a water depth of 4 ft (1.2m). Its best value is when installing aquapark mooring fields with tens or hundreds of moorings.

For any water depths over 4 ft (1.2m), rope segments can be added to extend the mooring length (requires purchase of additional rope segments, sold singly, or in sets of 10pc).

Vertical Mooring Line

One complete heavy duty mooring line for 4 foot (1,22m) water depth. 3000lb (1360kg) break strength, all components #316 Stainless steel. Easily add optional rope extensions to reach desired water depth - no knots required! Includes 1pc heavy duty bungie, 1pc #316 SS quick link, 1pc 1-foot mooring rope, 1pc line float and 1pc #316 SS snap hook.

US MAP: \$49.99

Item number: 585321248

SKU: 0790628045391



5-Foot Mooring Rope

5-foot (152cm) mooring rope extension. 4000lb PE rope eye spliced at both ends for easy attachment. Set of 10pc.

US MAP: \$99.99

Item number: 585321251

SKU: 0790628045421



1-Foot Mooring Rope

1 foot (31cm) mooring rope extension. 4000lb PE rope eye spliced at both ends for easy attachment. Set of 10pc.

US MAP: \$69.99

Item number: 585321250

SKU: 0790628045414



Complete Mooring Line, 19ft (5,79m)

One complete heavy duty mooring line for up to 19 foot (5,79m) water depth. Easily adjusts to required depth - no knots required! 3000lb (1360kg) break strength, all components #316 Stainless steel. Includes 1 heavy duty bungies, 1pc #316 SS quick link, 6pc 1-foot mooring ropes, 2pc 5-foot mooring ropes 1pc line float and 1pc #316 SS snap hook.

US MAP: \$99.99

Item number: 585321252

SKU: 0790628045438



Horizontal Mooring Line, Pair

Two complete heavy duty mooring lines for horizontal (pool) mooring. 10 foot (3,04m) length. 3000lb (1360kg) break strength, all components #316 Stainless steel. Easily add optional rope extensions if necessary - no knots required! Includes 2pc heavy duty bungies, 2pc #316 SS quick link, 2pc 1-foot mooring ropes, 2pc line floats and 2pc #316 SS snap hooks.

US MAP: \$119.99

Item number: 585321249

SKU: 0790628045407



PUMPS

Extension Hose for Aquapark Pump - This is a 33ft (10,0m) 40mm hose extension for the Aquapark Pump (110v or 230v) 7.3. Allows commercial park operators or residential customers to easily top off aquapark items while keeping A/C electrical pumps away from the water. Can also be used with Hurricane (110v or 230v) 3.6 pumps. Includes threaded attachments at both ends, HR and Boston fittings.

US MAP: \$129.99

Item number: 585321258

SKU: 0790628045490



12v Turbo 2.3 Pump - The 12v Turbo is an extremely powerful pump for 12 volt battery. Ideal for low-pressure kayaks and general use, this pump is high volume @ low pressure. Inflate/ deflate, 2.3 psi (0,16 bar) maximum. 12v alligator clip attachment only, 9ft (2,74m) cable. Air flow 35cfm (990L/min). 3.2ft (1m) hose with Stem, Boston, Rapid Inflate, Fish Eye, and HR adaptors.

US MAP: \$69.99

Item number: 585205004

SKU: 0790628010108

US MAP: \$69.99

Item number: 585205004

SKU: 0790628010108



Tornado 110v 2.5 Pump - A smaller version of the Hurricane pump, the Tornado 110v 2.5 is ideally suited for kayaks and small Lakefront aquaparks. Maximum 2.5psi (0,17bar). Air flow 56cfm (1600L/min). Includes 4ft (1,25m) of 25mm hose with HR, Boston and Stem fittings.

US MAP: \$59.99

Item number: 585318122

SKU: 0790628040570

US MAP: \$59.99

Item number: 585318122

SKU: 0790628040570



Hurricane 110v 3.6 Pump - Quickly inflates kayaks, Lakefront aquaparks and small commercial parks. Maximum 3.6psi (0,25 bar). Air flow 70cfm (2000L/min). Includes 4ft (1,25m) of 40mm hose with HR, Boston and Stem fittings.

US MAP: \$69.99

Item number: 585318120

SKU: 0790628040556

US MAP: \$69.99

Item number: 585318120

SKU: 0790628040556



Accelerator HP 12v 20 Pump - Ideally suited for modern SUPs and kayaks with high pressure dropstitch. This two-stage, digital pump makes quick work of inflating SUPs up to 20psi (1,37bar) with auto shut-off. Air flow 350L/min (stage 1), 70L/min (stage 2). Uses either 12v outlet or clip attachment. Includes 4ft (1,25m) hose with HR, Boston valve and stem fittings.

US MAP: \$159.99

Item number: 585321260

SKU: 0790628045513

US MAP: \$159.99

Item number: 585321260

SKU: 0790628045513



Aquapark 110v 7.3 Pump - High capacity pump for commercial aquapark. Twin motors provide additional capacity and max pressure of 7.3psi, ideal for dropstitch connectors. Air flow 1200L/min (stage 1) and 2000L/min (stage 2). Includes 4ft (1,25m) of 40mm hose with HR and Boston fittings.

US MAP: \$349.99

Item number: 585213101

SKU: 0790628032858

US MAP: \$349.99

Item number: 585213101

SKU: 0790628032858



NEW

 THOR L 30' x W 15' x H 12.7' (L 9,1m x W 4,6m x H 3,9m)	 ANVL L 16' x W 15' x H 10' (L 4,9m x W 4,6m x H 3,1m)	 HAMMER L 15' x W 14' x H 8' (L 4,6m x W 4,2m x H 2,4m)	 DOUBLE ICECAP L 10' x W 10.6' x H 3.1' (L 6,1m x W 3,2m x H 1,0m)	 FIGURE 8 L 10' x W 10.6' x H 1.6' (L 6,1m x W 3,2m x H 0,5m)	 UNIVERSAL ICECAP L 12.6' x W 12.6' x H 3.1' (L 3,8m x W 3,8m x H 1,0m)	 UNIVERSAL KEYHOLE L 12.6' x W 12.6' x H 5.6' (L 3,8m x W 3,8m x H 1,7m)	 RIVIERA LOUNGE L 10' x W 10' x H 7.5' (L 3,05m x W 3,05m x H 2,3m)	 ARENA 40 L 40' x W 20' x H 8.3' (L 12,2m x W 6,1m x H 2,5m)	 ARENA 30 L 30' x W 15' x H 8.3' (L 9,2m x W 4,6m x H 2,5m)	
 LOKI CORNER L 17.5' x W 15.1' x H 10.6' (L 5,3m x W 4,6m x H 3,2m)	 LOKI L 17.5' x W 15.1' x H 10.6' (L 5,3m x W 4,6m x H 3,2m)	 QUARTERBACK L 15.2' x W 9' x H 4.7' (L 4,6m x W 2,7m x H 1,4m)	 LUGEWAY 10 L 10' x W 5.2' x H 3.4' (L 3,1m x W 1,6m x H 1,1m)	 LUGEWAY 20 L 20' x W 5.2' x H 3.4' (L 6,1m x W 1,6m x H 1,1m)	 LUGEBACK L 15.2' x W 7.1' x H 4.1' (L 4,6m x W 2,2m x H 1,3m)	 UNIVERSAL ARCHWAY L 12.6' x W 12.6' x H 8.2' (L 3,9m x W 3,9m x H 2,5m)	 UNIVERSAL PAVILION L 12.6' x W 12.6' x H 12.4' (L 3,9m x W 3,9m x H 3,8m)	 SOLARIUM L 10' x W 6.56' x H 0.5' (L 3,05m x W 2,0m x H 0,15m)	 O.G. LOUNGE L 10' x W 10' x H 7.5' (L 3,05m x W 3,05m x H 2,3m)	
 EVEREST L 39' x W 16.3' x H 20.6' (L 12m x W 5m x H 6,3m)	 FREEFALL SUPREME L 16' x W 13' x H 16.6' (L 8m x W 3,8m x H 5,1m)	 SUMMIT EXPRESS L 30' x W 9' x H 16.4' (L 9m x W 2,7m x H 5m)	 JUNGLE JOE 2 L 21.6' x W 18' x H 12' (L 6,6m x W 5,5m x H 3,8m)	 FREEFALL EXTREME L 21' x W 9' x H 9.6' (L 6,4m x W 2,7m x H 3m)	 KING OF THE MOUNTAIN L 14' x W 9' x H 6.6' (L 4m x W 2,7m x H 2m)	 FREEFALL 6 L 13' x W 8' x H 8' (L 4,1m x W 2,4m x H 1,8m)	 JUNGLE JIM L 10' x W 10.2' x H 6.8' (L 3m x W 3,1m x H 2,1m)	 OHANA LOUNGE L 10' x W 10' x H 7.5' (L 3,05m x W 3,05m x H 2,3m)	 REVEL LOUNGE L 20' x W 10' x H 7.5' (L 3,05m x W 3,05m x H 2,3m)	
 SKYROCKET L 26.3' x W 26.3' x H 26.3' (L 8m x W 8m x H 8m)	 CATAPULT L 16' x W 13' x H 15' (L 4,8m x W 4m x H 4,6m)	 THUNDERDOME L 15' x W 15' x H 7.5' (L 4,5m x W 4,5m x H 2,3m)	 NEPTUNE L 20' x W 18' x H 9.8' (L 6,1m x W 5,5m x H 3m)	 MONKEY DOME L 20' x W 10' x H 10.9' (L 6,1m x W 3,1m x H 3,3m)	 CYCLONE ENCLOSURE L 20' x W 15' x H 5.2' (L 6,1m x W 4,6m x H 1,6m)	 PARKWAY 30 L 30' x W 6.5' x H 3.5' (L 9,1m x W 2m x H 1,1m)	 PARKWAY 20 L 20' x W 6.5' x H 3.5' (L 6,1m x W 2m x H 1,1m)	 BLOCKADE 20 L 20' x W 6.5' x H 5' (L 6,1m x W 2m x H 1,5m)	 I-BEAM L 20' x W 10' x H 1.6' (L 6,1m x W 3m x H 0,5m)	
 VISTA 10 L 10' x W 6.5' x H 5' (L 3m x W 2m x H 1,5m)	 SIERRA 10 L 10' x W 6.5' x H 3.5' (L 3m x W 2m x H 1,1m)	 FOXTROT 20 L 20' x W 5' x H 1.5' (L 6,1m x W 1,5m x H 0,5m)	 DELTA 10 L 10' x W 6.75' x H 1.5' (L 3,1m x W 2,1m x H 0,5m)	 PARKWAY 10 L 10' x W 6.5' x H 2.3' (L 3m x W 2m x H 0,7m)	 BARRICADE 10 L 10' x W 6.5' x H 5' (L 3m x W 2m x H 1,5m)	 OVERPASS 10 L 10' x W 6.5' x H 1.7' (L 3m x W 1,8m x H 1,7m)	 SUBWAY 10 L 10' x W 6.5' x H 5' (L 3m x W 2,5m x H 1,5m)	 TANGO L 6.6' x W 6.6' x H 1.5' (L 2m x W 2m x H 0,5m)	 ZULU L 10.8' x W 6.5' x H 5.3' (L 3,3m x W 2m x H 1,6m)	
 LIFEGUARD STATION L 12.63' x W 12.63' x H 14.9' (L 3,9m x W 3,9m x H 4,5m)	 UNIVERSAL MONSOON L 12.7' x W 12.7' x H 9' (L 3,8m x W 3,8m x H 2,8m)	 UNIVERSAL THUNDERDOME L 12.5' x W 12.5' x H 4.9' (L 3,8m x W 3,8m x H 1,5m)	 UNIVERSAL L 12.5' x W 12.5' x H 1' (L 3,8m x W 3,8m x H 0,3m)	 I-HOP L 20' x W 10' x H 1.7' (L 6,1m x W 3m x H 0,5m)	 CYCLONE WHEEL L 8' x W 8' x H 8.5' (L 2,4m x W 2,4m x H 2,6m)	 BENDBACK L 15' x W 7' x H 2.5' (L 4,6m x W 2,2m x H 0,8m)	 KICKBACK L 15' x W 7' x H 2.5' (L 4,6m x W 2,2m x H 0,8m)	 WALKBACK L 15' x W 7' x H 0.3' (L 4,6m x W 2,1m x H 0,1m)	 LANDING PAD 4M L 13' x W 13' x H 0.49' (L 4m x W 4m x H 0,15m)	
 REBOUND 20 L 20' x W 20' x H 3.2' (L 6m x W 6m x H 1m)	 SUPERTRAMP 17 L 17' x W 17' x H 3' (L 5,2m x W 5,2m x H 0,9m)	 SUPERTRAMP 23 L 22.5' x W 22.5' x H 3.3' (L 7m x W 7m x H 1m) 17.3' jump surface (6,3m)	 SUPERTRAMP 27 L 20' x W 20' x H 3' (L 6m x W 6m x H 0,9m)	 SUPERTRAMP 35 L 35' x W 19' x H 3.5' (L 10,7m x W 5,8m x H 1,1m)	 SUPERVOLLEY 30 L 29.5' x W 15.5' x H 3' (L 9m x W 4,7m x H 0,9m)	 ESCALADE 2m L 5' x W 5' x H 6' (L 1,5m x W 1,5m x H 1,8m)	 ESCALADE 3m L 5' x W 5' x H 8' (L 1,5m x W 1,5m x H 2,5m)	 ESCALADE SUMMIT L 4.1' x W 5' x H 12' (L 1,3m x W 1,4m x H 3,7m)	 PLUNGE SLIDE L 6.6' x W 5.4' x H 4.4' (L 2m x W 1,7m x H 1,4m)	
 BREEZEWAY 10 L 10' x W 5' x H 0.8' (L 3m x W 1,6m x H 0,2m)	 BREEZEWAY 20 L 20' x W 5' x H 0.8' (L 6m x W 1,6m x H 0,2m)	 WALK ON WATER L 20' x W 1.3m x H 0.1m	 SPEEDWAY 20 L 20' x W 5' x H 0.4' (L 6m x W 1,5m x H 0,1m)	 SPEEDWAY 10 L 10' x W 5' x H 0.4' (L 3m x W 1,5m x H 0,1m)	 SPLASHMAT L 18' x W 5' x H 0.4' (L 5,5m x W 1,5m x H 0,1m)	 SWIMSTEP XL L 5' x W 13' x H 5.5' (L 1,5m x W 2m x H 0,1m)	 SWIMSTEP 5X5 L 5' x W 5' x H 0.4' (L 1,5m x W 1,5m x H 0,1m)	 SWIMSTEP L 5' x W 3.5' x H 0.7' (L 1,5m x W 1,1m x H 0,2m)	 AQUATRAINER MAT L 8.1' x W 2.9' x H 0.5' (L 2,5m x W 0,9m x H 0,2m)	
 DOCKING STATION L 9.8' x W 14.7' x H 0.3' (L 3m x W 4,5m x H 0,1m)	 OCEAN POOL 4M L 13' x W 13' x H 8' (L 4m x W 4m x H 2,4m)	 OCEAN POOL 5X6M L 20' x W 16.6' x H 8' (L 6,1m x W 5,1m x H 2,4m)	 BLAST BAG L 12' x W 5.4' x H 3' (L 3,7m x W 1,7m x H 1m)	 AXIS L 12' x W 7.7' x H 5' (L 3,7m x W 2,4m x H 1,6m)	 ROCKIT JR L 9.5' x W 9.5' x H 3.6' (L 3m x W 3m x H 1,1m)	 ROCKIT L 13' x W 13' x H 5.5' (L 4m x W 4m x H 1,7m)	 EVENT TENT L 12' x W 12' x H 10.2' (L 3,6m x W 3,6m x H 3,1m)	 TRIAD L 30' x W 30' x H 1.5' (L 9,2m x W 9,2m x H 0,5m)	 KAOS L 25' x W 5' x H 4' (L 7,6m x W 1,5m x H 1,2m)	 ESCALADE 5M YACHT WALL L 1.9' x W 9.8' x H 16.4' (L 0,6m x W 3,0m x H 5,0m)



1.855.502.AQUA
1345 NW WALL ST SUITE 100 BEND, OR 97703

